


Femmina 45° compatta ORFS

Acciaio al carbonio

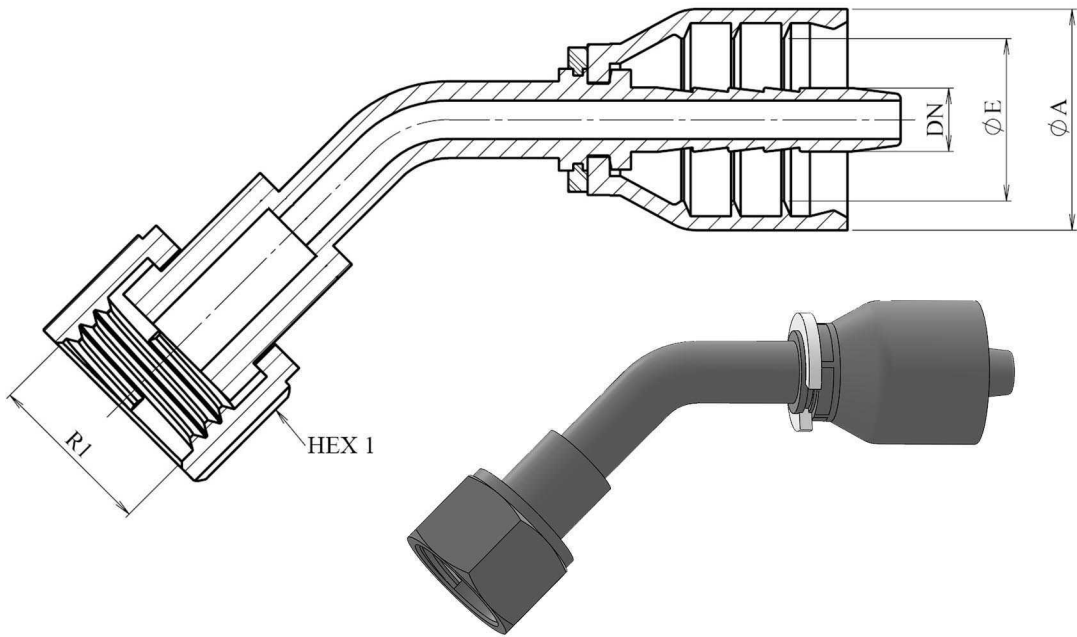

Codice	DN	R1	Dettagli	L1	HEX 1	ØA	ØE
289080904	1/4"	9/16" 18h	449080904 + PFC221200400	22,5	19	23	16,9
289081008	1/2"	1" 14h	449081008 + PFC221200800	23,7	30	32	24,8
289081104	1/4"	11/16" 16h	449081104 + PFC221200400	23,5	22	23	16,9
289081105	5/16"	11/16" 16h	449081105 + PFC221200500	23,5	22	23,7	17,5
289081106	3/8"	11/16" 16h	449081106 + PFC221200600	23,5	22	28	20,7
289081306	3/8"	13/16" 16h	449081306 + PFC221200600	26,4	24	28	20,7
289081308	1/2"	13/16" 16h	449081308 + PFC221200800	26,4	24	32	24,8
289081610	5/8"	1" 14h	449081610 + PFC221201000	29,8	30	35	27,8
289081908	1/2"	1"3/16 12h	449081908 + PFC221200800	34,9	36	32	24,8
289081912	3/4"	1"3/16 12h	449081912 + PFC221201200	34,9	36	40	32
289082312	3/4"	1"7/16 12h	449082312 + PFC221201200	42	41	40	32
289082316	1"	1"7/16 12h	449082316 + PFC221201600	42	41	47	39
289082720	1"1/4	1"11/16 12h	449082720 + PFC221202000	53,5	50	59,8	49,4
289083224	1"1/2	2" 12h	449083224 + PFC221202400	53,5	60	61,6	56