Light series reinforced clamp, plastic smooth profile

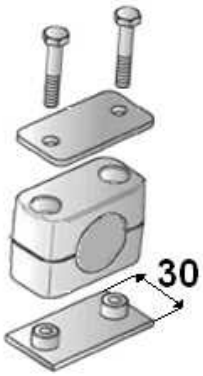

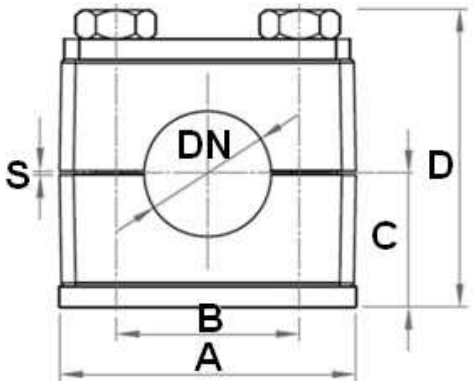

Recommended temperature -30 °C + 90 °C.

Materials: Metal parts: carbon steel St 37-2
Clamps: Polypropilene
Bottom plate: phosphated.
Bolts and cover plate: galvanized.
Materials

Part nº	DN		u/ Bag	A	B	C	D	S
A41AZ08PL	8	1	10	36	20	16,5	37	0,4
A41AZ10PL	10	1	10	36	20	16,5	37	0,4
A41AZ12PL	12	1	10	36	20	16,5	37	0,4
A41AZ13.2PL	1/4"	2	10	42	26	19,5	43	0,6
A41AZ15PL	15	2	10	42	26	19,5	43	0,6
A41AZ16.7PL	3/8"	2	10	42	26	19,5	43	0,6
A41AZ18PL	18	2	10	42	26	19,5	43	0,6
A41AZ20PL	20	3	10	50	33	21	46	0,6
A41AZ21.3PL	1/2"	3	10	50	33	21	46	0,6
A41AZ22PL	22	3	10	50	33	21	46	0,6
A41AZ25PL	25	3	10	50	33	21	46	0,6
A41AZ26.7PL	3/4"	4	10	60	40	24	52	0,6
A41AZ28PL	28	4	10	60	40	24	52	0,6
A41AZ30PL	30	4	10	60	40	24	52	0,6
A41AZ33.3PL	1"	5	10	71	52	32	68	0,8
A41AZ35PL	35	5	10	71	52	32	68	0,8
A41AZ38PL	38	5	10	71	52	32	68	0,8
A41AZ42PL	42-1" 1/4	5	10	71	52	32	68	0,8

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.