


Racor de reducción TL Métrica (serie pesada)

Acero Carbono

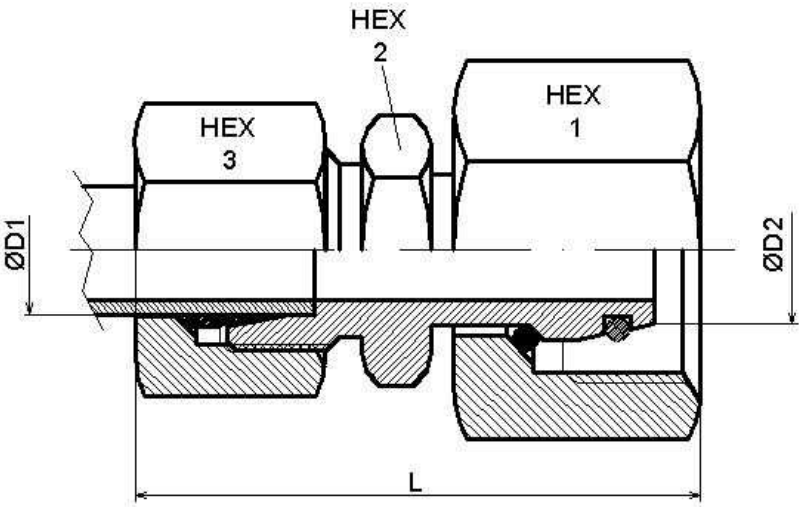

Artículo	ØD1	ØD2	Serie	Presión trabajo (bar)	L	HEX 1	HEX 2	HEX 3
KORS 8-6TLM	6	8	S	630	43	19	14	17
KORS 10-6TLM	6	10	S	630	44,5	22	17	17
KORS 10-8TLM	8	10	S	630	44,5	22	17	19
KORS 12-6TLM	6	12	S	630	45	24	17	17
KORS 12-8TLM	8	12	S	630	45	24	17	19
KORS 12-10TLM	10	12	S	630	47	24	19	22
KORS 14-6TLM	6	14	S	630	48	27	19	17
KORS 14-8TLM	8	14	S	630	48	27	19	19
KORS 14-10TLM	10	14	S	630	49	27	19	22
KORS 14-12TLM	12	14	S	630	49	27	22	24
KORS 16-8TLM	8	16	S	420	49	30	22	19
KORS 16-10TLM	10	16	S	420	50	30	22	22
KORS 16-12TLM	12	16	S	420	50	30	22	24
KORS 16-14TLM	14	16	S	420	53,5	30	24	27
KORS 20-6TLM	6	20	S	420	54	36	27	17
KORS 20-8TLM	8	20	S	420	54	36	27	19
KORS 20-10TLM	10	20	S	420	55	36	27	22
KORS 20-12TLM	12	20	S	420	55	36	27	24
KORS 20-14TLM	14	20	S	420	58	36	27	27
KORS 20-16TLM	16	20	S	420	58	36	27	30
KORS 25-6TLM	6	25	S	420	56,5	46	32	17
KORS 25-8TLM	8	25	S	420	56,5	46	32	19
KORS 25-10TLM	10	25	S	420	57,5	46	32	22
KORS 25-12TLM	12	25	S	420	57,5	46	32	24

La información recogida en esta ficha (Catálogo) es de carácter orientativo y puede ser modificada sin previo aviso. DICSA no se hace responsable de una incorrecta utilización del producto, salvo las referentes a defectos de fabricación.

Racor de reducción TL Métrica (serie pesada)

Acero Carbono

2/2

Artículo	ØD1	ØD2	Serie	Presión trabajo (bar)	L	HEX 1	HEX 2	HEX 3
KORS 25-14TLM	14	25	S	420	60,5	46	32	27
KORS 25-16TLM	16	25	S	420	60,5	46	32	30
KORS 25-20TLM	20	25	S	420	63,5	46	32	36
KORS 30-12TLM	12	30	S	420	62,5	50	41	24
KORS 30-16TLM	16	30	S	420	65,5	50	41	30
KORS 30-20TLM	20	30	S	420	68,5	50	41	36
KORS 30-25TLM	25	30	S	420	71,5	50	41	46
KORS 38-16TLM	16	38	S	315	69,5	60	50	30
KORS 38-20TLM	20	38	S	315	72,5	60	50	36
KORS 38-25TLM	25	38	S	315	75,5	60	50	46
KORS 38-30TLM	30	38	S	315	78,5	60	50	50