

Diritto intermedio con dado girevole e O'ring



Acciaio al carbonio 1/1

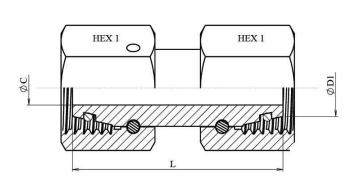



| Codice | ØD1 | Serie | Pressione di lavoro (bar) | L | HEX 1 | ØС |
|--------|-----|-------|------------------------------|------|-------|-----|
| ATL 6 | 6 | L | 500 | 36,3 | 14 | 2,5 |
| ATL 8 | 8 | L | 500 | 36 | 17 | 4 |
| ATL 10 | 10 | L | 500 | 37 | 19 | 6 |
| ATL 12 | 12 | L | 400 | 39 | 22 | 8 |
| ATL 15 | 15 | L | 400 | 41,8 | 27 | 10 |
| ATL 18 | 18 | L | 400 | 45,2 | 32 | 13 |
| ATL 22 | 22 | L | 250 | 44,4 | 36 | 17 |
| ATL 28 | 28 | L | 250 | 46,8 | 41 | 22 |
| ATL 35 | 35 | L | 250 | 51,4 | 50 | 28 |
| ATL 42 | 42 | L | 250 | 52,4 | 60 | 34 |
| ATS 6 | 6 | S | 630 | 35,3 | 17 | 2,5 |
| ATS 8 | 8 | S | 630 | 37,5 | 19 | 4 |
| ATS 10 | 10 | S | 630 | 41,6 | 22 | 6 |
| ATS 12 | 12 | S | 630 | 38,8 | 24 | 8 |
| ATS 14 | 14 | S | 630 | 39,8 | 27 | 8 |
| ATS 16 | 16 | S | 420 | 39,8 | 30 | 11 |
| ATS 20 | 20 | S | 420 | 48,4 | 36 | 14 |
| ATS 25 | 25 | S | 420 | 46,2 | 46 | 18 |
| ATS 30 | 30 | S | 420 | 51,4 | 50 | 23 |
| ATS 38 | 38 | S | 315 | 57,4 | 60 | 30 |

Stampati: 17/05/2025 04:19