
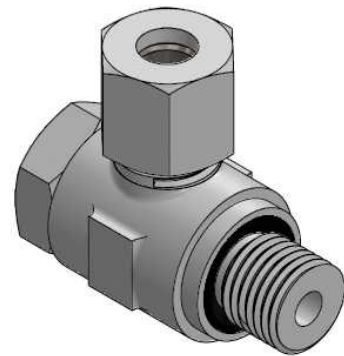


**Equerre orientable sans étrangleur gaz BSP
(passage total)**

Acier au carbone

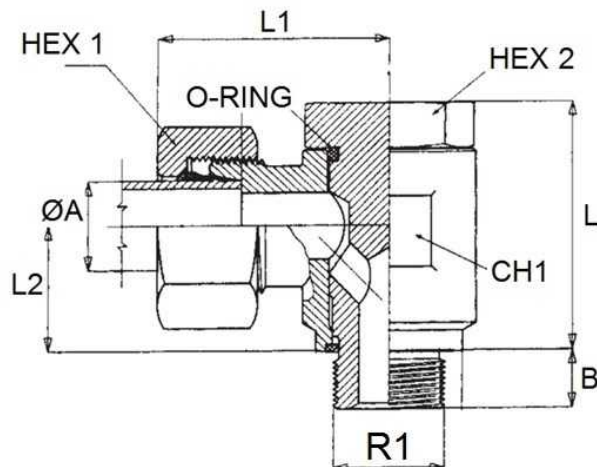

Référence	ØD1	Série	R1	Pression de service (bar)	L	L1	L2	HEX 1	HEX 2	CH1	B
WSVLL 6 R 1/8	6	LL	1/8" BSP	100	24	24	10,5	12	17	17	8
WSVLL 8 R 1/8	8	LL	1/8" BSP	100	24	25	10,5	14	17	17	8
WSVL 6 R 1/8	6	L	1/8" BSP	315	24	27	10,5	14	17	17	8
WSVL 8 R 1/4	8	L	1/4" BSP	315	32,5	29,5	14	17	19	22	12
WSVL 10 R 1/4	10	L	1/4" BSP	315	30	35,7	14	19	19	22	12
WSVL 12 R 1/4	12	L	1/4" BSP	315	29	33	12	22	24	12	12
WSVL 12 R 3/8	12	L	3/8" BSP	315	38,5	33	16,5	22	24	27	12
WSVL 15 R 1/2	15	L	1/2" BSP	315	46,5	37	21,5	27	30	32	14
WSVL 18 R 1/2	18	L	1/2" BSP	315	46,5	38	21,5	32	30	32	14
WSVL 22 R 3/4	22	L	3/4" BSP	160	54	43	24	36	36	41	16
WSVL 28 R 1	28	L	1" BSP	160	66,5	47,5	30,5	41	46	50	18
WSVL 35 R 1 1/4	35	L	1"1/4 BSP	160	80	56,5	35,5	50	55	60	20
WSVL 42 R 1 1/2	42	L	1"1/2 BSP	160	90	62,5	40,5	60	60	70	22
WSVS 6 R 1/4	6	S	1/4" BSP	400	32	31,5	14	17	19	22	12
WSVS 8 R 1/4	8	S	1/4" BSP	400	32	31,5	14	19	19	22	12
WSVS 10 R 3/8	10	S	3/8" BSP	630	38,5	35	16,5	22	24	27	12
WSVS 12 R 3/8	12	S	3/8" BSP	630	36,5	40,2	25	24	24	27	12
WSVS 14 R 1/2	14	S	1/2" BSP	630	46,5	41	21,5	27	27	32	14
WSVS 16 R 1/2	16	S	1/2" BSP	400	46,5	41	21,5	30	30	32	14
WSVS 20 R 3/4	20	S	3/4" BSP	400	54	47	24	36	36	41	16
WSVS 25 R 1	25	S	1" BSP	400	66,5	54,5	30,5	46	46	50	18
WSVS 30 R 1 1/4	30	S	1"1/4 BSP	250	80	62,5	35,5	50	55	60	20
WSVS 38 R 1 1/2	38	S	1"1/2 BSP	250	90	71,5	40,5	60	60	70	22