


Racor en codo orientable sin estrangulador rosca
Métrica

Acero Carbono

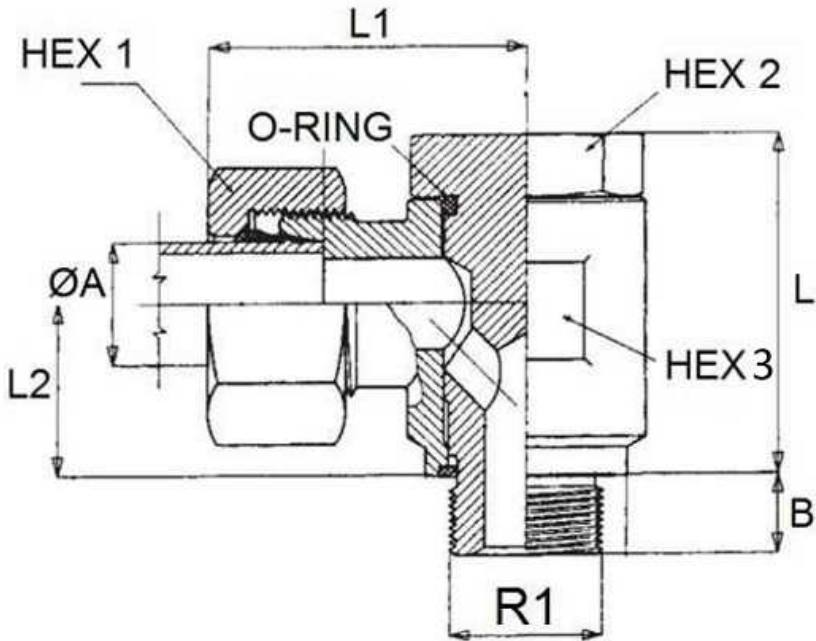

Artículo	ØD1	Serie	R1	Presión trabajo (bar)	L	L1	L2	HEX 1	HEX 2	HEX 3
WSVLL 6 M 10X1	6	LL	M10X1	100	24	18	10,5	12	17	17
WSVLL 8 M 10X1	8	LL	M10X1	100	24	19	10,5	14	17	17
WSVL 6 M 10X1	6	L	M10X1	315	24	19	10,5	14	17	17
WSVL 8 M 12X1.5	8	L	M12X1.5	315	32	21,5	14	17	19	22
WSVL 10 M 14X1.5	10	L	M14X1.5	315	32	22,5	14	19	19	22
WSVL 12 M 16X1.5	12	L	M16X1.5	315	38,5	25	16,5	22	24	27
WSVL 15 M 18X1.5	15	L	M18X1.5	315	42	29	18,5	27	27	32
WSVL 18 M 22X1.5	18	L	M22X1.5	315	46,5	29	21,5	32	30	32
WSVL 22 M 26X1.5	22	L	M26X1.5	160	54	34	24	36	36	41
WSVL 28 M 33X2	28	L	M33X2	160	66,5	38,5	30,5	41	46	50
WSVL 42 M 48X2	42	L	M48X2	160	90	50,5	40,5	60	60	70
WSVS 8 M 14X1.5	8	S	M14X1.5	630	32	23,5	14	19	19	22
WSVS 10 M 16X1.5	10	S	M16X1.5	630	38,5	26	16,5	22	24	27
WSVS 12 M 18X1.5	12	S	M18X1.5	630	42	29	18,5	24	27	32
WSVS 16 M 22X1.5	16	S	M22X1.5	400	46,5	31	21,5	30	30	32
WSVS 20 M 27X2	20	S	M27X2	400	54	36	24	36	36	41
WSVS 30 M 42X2	30	S	M42X2	250	80	49,5	35,5	50	55	60
WSVS 38 M 48X2	38	S	M48x2	250	90	56,5	40,5	60	60	70