# Straight male stud coupling with captive seal BSP cyl



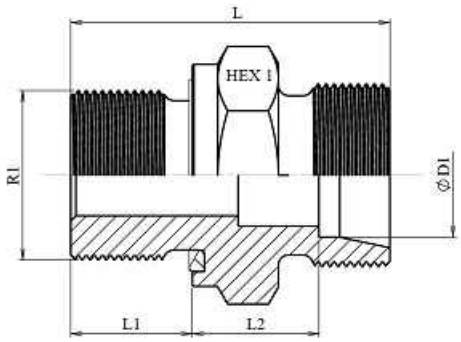

| Part nº | ØD1 | Serie | R1 | Working Pressure (bar) | L | L1 | L2 | HEX 1 |
|---|---|---|---|---|---|---|---|---|
| **STA AL 6 R 1/8 WD** | 6 | L | 1/8" BSP | 500 | 23,5 | 8 | 8,5 | 14 |
| **STA AL 6 R 1/4 WD** | 6 | L | 1/4" BSP | 500 | 28 | 12 | 9 | 19 |
| **STA AL 6 R 3/8 WD** | 6 | L | 3/8 BSP | 500 | 31,5 | 12 | 12,5 | 22 |
| **STA AL 8 R 1/8 WD** | 8 | L | 1/8" BSP | 500 | 24,5 | 8 | 9,5 | 14 |
| **STA AL 8 R 1/4 WD** | 8 | L | 1/4" BSP | 500 | 29 | 12 | 10 | 19 |
| **STA AL 8 R 3/8 WD** | 8 | L | 3/8 BSP | 400 | 29,5 | 12 | 10,5 | 22 |
| **STA AL 8 R 1/2 WD** | 8 | L | 1/2" BSP | 400 | 34 | 14 | 13 | 27 |
| **STA AL 10 R 1/8 WD** | 10 | L | 1/8" BSP | 500 | 25,5 | 8 | 10,5 | 17 |
| **STA AL 10 R 1/4 WD** | 10 | L | 1/4 BSP | 500 | 30 | 12 | 11 | 19 |
| **STA AL 10 R 3/8 WD** | 10 | L | 3/8 BSP | 400 | 30,5 | 12 | 11,5 | 22 |
| **STA AL 10 R 1/2 WD** | 10 | L | 1/2 BSP | 400 | 33 | 14 | 12 | 27 |
| **STA AL 12 R 1/4 WD** | 12 | L | 1/4 BSP | 400 | 31 | 12 | 12 | 19 |
| **STA AL 12 R 3/8 WD** | 12 | L | 3/8 BSP | 400 | 31,5 | 12 | 12,5 | 22 |
| **STA AL 12 R 1/2 WD** | 12 | L | 1/2 BSP | 400 | 34 | 14 | 13 | 27 |
| **STA AL 12 R 3/4 WD** | 12 | L | 3/4" BSP | 400 | 40,5 | 16 | 16,5 | 41 |
| **STA AL 15 R 3/8 WD** | 15 | L | 3/8 BSP | 400 | 32,5 | 12 | 13,5 | 24 |
| **STA AL 15 R 1/2 WD** | 15 | L | 1/2 BSP | 315 | 35 | 14 | 14 | 27 |
| **STA AL 15 R 3/4 WD** | 15 | L | 3/4 BSP | 250 | 37 | 16 | 14 | 32 |
| **STA AL 18 R 3/8 WD** | 18 | L | 3/8" BSP | 400 | 33,5 | 12 | 11,5 | 27 |
| **STA AL 18 R 1/2 WD** | 18 | L | 1/2 BSP | 400 | 36 | 14 | 14,5 | 27 |
| **STA AL 18 R 3/4 WD** | 18 | L | 3/4 BSP | 250 | 38 | 16 | 14,5 | 32 |
| **STA AL 22 R 1/2 WD** | 22 | L | 1/2 BSP | 250 | 38 | 14 | 16,5 | 32 |
| **STA AL 22 R 3/4 WD** | 22 | L | 3/4 BSP | 250 | 40 | 16 | 16,5 | 32 |
| **STA AL 22 R 1 WD** | 22 | L | 1 | 250 | 42 | 18 | 16,5 | 41 |
| **STA AL 28 R 3/4 WD** | 28 | L | 3/4 BSP | 250 | 41 | 16 | 17,5 | 41 |
| **STA AL 28 R 1 WD** | 28 | L | 1" BSP | 250 | 43 | 18 | 17,5 | 41 |
| **STA AL 28 R 1 1/4 WD** | 28 | L | 1" 1/4 BSP | 250 | 46 | 20 | 18,5 | 50 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*

# Straight male stud coupling with captive seal BSP cyl



| Part nº | ØD1 | Serie | R1 | Working Pressure (bar) | L | L1 | L2 | HEX 1 |
|---|---|---|---|---|---|---|---|---|
| **STA AL 35 R 1 WD** | 35 | L | 1" BSP | 250 | 45,5 | 18 | 17,5 | 46 |
| **STA AL 35 R 1 1/4 WD** | 35 | L | 1 1/4 BSP | 250 | 48 | 20 | 17,5 | 50 |
| **STA AL 42 R 1 1/2 WD** | 42 | L | 1 1/2 BSP | 250 | 52 | 22 | 19 | 55 |
| **STA AS 6 R 1/4 WD** | 6 | S | 1/4 BSP | 630 | 32 | 12 | 13 | 19 |
| **STA AS 8 R 1/4 WD** | 8 | S | 1/4 BSP | 630 | 34 | 12 | 15 | 19 |
| **STA AS 8 R 3/8 WD** | 8 | S | 3/8 BSP | 630 | 34,5 | 12 | 15,5 | 22 |
| **STA AS 10 R 1/4 WD** | 10 | S | 1/4 BSP | 630 | 34 | 12 | 14,5 | 19 |
| **STA AS 10 R 3/8 WD** | 10 | S | 3/8 BSP | 630 | 34,5 | 12 | 15 | 22 |
| **STA AS 10 R 1/2 WD** | 10 | S | 1/2 BSP | 630 | 37 | 14 | 15,5 | 27 |
| **STA AS 12 R 1/4 WD** | 12 | S | 1/4 BSP | 630 | 36 | 12 | 16,5 | 22 |
| **STA AS 12 R 3/8 WD** | 12 | S | 3/8 BSP | 630 | 36,5 | 12 | 17 | 22 |
| **STA AS 12 R 1/2 WD** | 12 | S | 1/2 BSP | 630 | 39 | 14 | 17,5 | 27 |
| **STA AS 14 R 3/8 WD** | 14 | S | 3/8" BSP | 630 | 38,5 | 12 | 12,5 | 24 |
| **STA AS 14 R 1/2 WD** | 14 | S | 1/2 BSP | 630 | 41 | 14 | 19 | 27 |
| **STA AS 16 R 3/8 WD** | 16 | S | 3/8 BSP | 420 | 38,5 | 12 | 18 | 27 |
| **STA AS 16 R 1/2 WD** | 16 | S | 1/2 BSP | 420 | 41 | 14 | 18,5 | 27 |
| **STA AS 16 R 3/4 WD** | 16 | S | 3/4 BSP | 420 | 43 | 16 | 18,5 | 32 |
| **STA AS 20 R 1/2 WD** | 20 | S | 1/2" BSP | 420 | 45 | 14 | 12 | 32 |
| **STA AS 20 R 3/4 WD** | 20 | S | 3/4 BSP | 420 | 47 | 16 | 20,5 | 32 |
| **STA AS 25 R 3/4 WD** | 25 | S | 3/4 BSP | 420 | 51 | 16 | 23 | 41 |
| **STA AS 25 R 1 WD** | 25 | S | 1"BSP | 420 | 53 | 18 | 23 | 41 |
| **STA AS 30 R 1 WD** | 30 | S | 1" BSP | 420 | 55 | 18 | 23,5 | 46 |
| **STA AS 30 R 1 1/4 WD** | 30 | S | 1 1/4 BSP | 420 | 57 | 20 | 23,5 | 50 |
| **STA AS 38 R 1 1/4 WD** | 38 | S | 1" 1/4 BSP | 315 | 62 | 20 | 26 | 55 |
| **STA AS 38 R 1 1/2 WD** | 38 | S | 1 1/2 BSP | 315 | 64 | 22 | 24 | 55 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*