


# Coupleur rapide à clapet norme ISO 7241-A filetage NPT

Acier au carbone

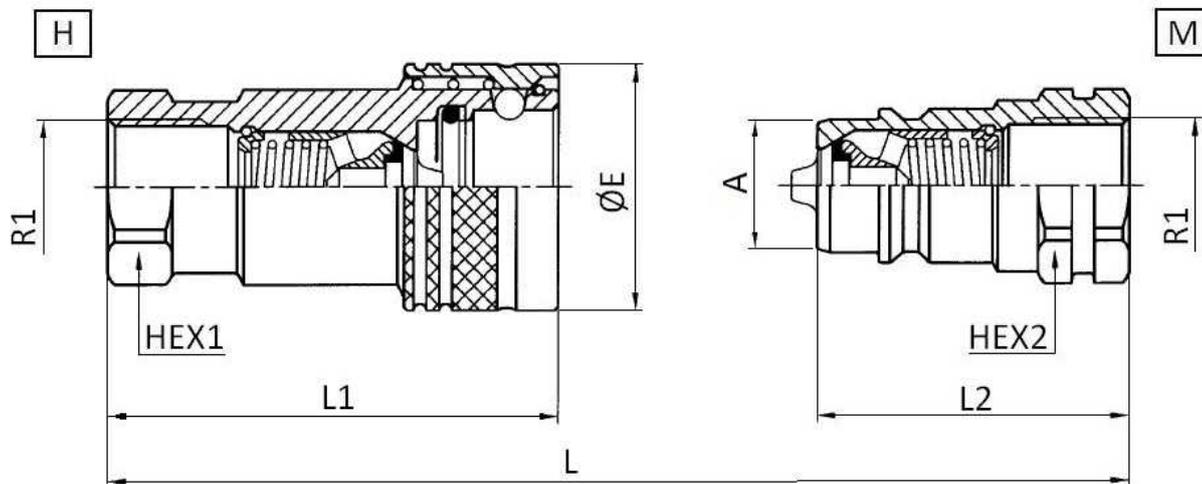

**Matériel:** Acier

**Joints:** NBR

**Température de service:** -25°C / +100°C

**Pression de service:** 160-350 bar

Référence	R1	Pression de service (bar)	Taille ISO	Taille BG	Coupleurs	Débit d'eau (l/min)	DÉBIT MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A801104	1/4" NPT	350	6,3	1	M	12	17	70,5		35		19		11,8
A801106	3/8" NPT	350	10	2	M	23	46	85		42,5		22		17,3
A801108	1/2" NPT	250	12,5	3	M	45	90	96,5		48		27		20,5
A801112	3/4" NPT	250	20	4	M	106	190	114,5		57		34		29,1
A801116	1" NPT	200	25	5	M	189	280	135,5		67,5		41		34,35
A801120	1"1/4 NPT	200	31,5	6	M	288	480	150,6		75		50		45
A801124	1"1/2 NPT	190	40	7	M	379	700	167,7		83,5		60		55
A801132	2" NPT	50	50	8	M	757	757	217		108		75		65,1
A801204	1/4" NPT	350	6,3	1	H	12	17	70,5	49,2			19	26	-
A801206	3/8" NPT	350	10	2	H	23	46	85	60,5			22	30	-
A801208	1/2" NPT	250	12,5	3	H	45	90	96,5	70			27	38	-
A801212	3/4" NPT	250	20	4	H	106	190	114,5	84,3			34	45	-
A801216	1" NPT	200	25	5	H	189	280	135,5	101			41	52	-
A801220	1"1/4 NPT	200	31,5	6	H	288	480	150,6	116,9			50	70	-
A801224	1"1/2 NPT	190	40	7	H	379	700	167,7	133			60	82	-
A801232	2" NPT	50	50	8	H	757	757	217	169			75	99	-