


TraleGreen quick-release couplings

TraleGreen Quick release couplings

**ISO A Quick release coupling**

Mild Steel

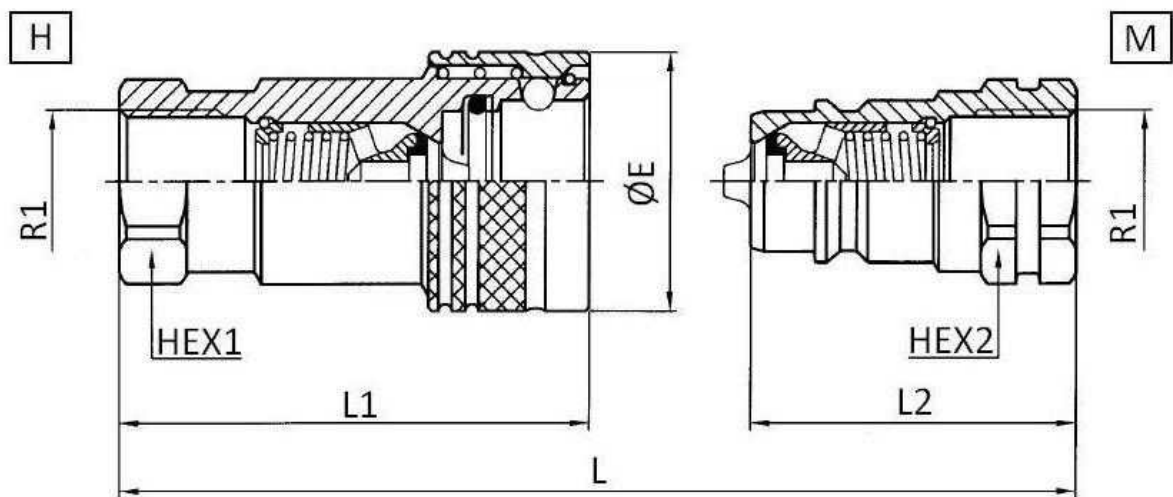

**Material:** Steel

**Gaskets:** NBR

**Working temperature::** -25°C / +100°C

**Working pressure:** 160-350 Bar

| Part nº | R1       | Working Pressure (bar) | ISO size | BG size | Coupling | Water flow(l/min) | L   | L1   | L2   | HEX 1 | HEX 2 | ØE   |
|---------|----------|------------------------|----------|---------|----------|-------------------|-----|------|------|-------|-------|------|
| C800104 | 1/4" BSP | 350                    | 6,3      | 1       | M        | 12                | 71  |      | 35,5 |       | 19    |      |
| C800106 | 3/8" BSP | 350                    | 10       | 2       | M        | 23                | 75  |      | 40   |       | 22    |      |
| C800108 | 1/2" BSP | 250                    | 12,5     | 3       | M        | 45                | 88  |      | 45   |       | 27    |      |
| C800112 | 3/4" BSP | 250                    | 20       | 4       | M        | 106               | 115 |      | 57   |       | 34    |      |
| C800116 | 1" BSP   | 200                    | 25       | 5       | M        | 189               | 120 |      | 60   |       | 41    |      |
| C800204 | 1/4" BSP | 250                    | 6,3      | 1       | H        | 12                | 71  | 50   |      | 19    |       | 26   |
| C800206 | 3/8" BSP | 350                    | 10       | 2       | H        | 23                | 75  | 57   |      | 22    |       | 31   |
| C800208 | 1/2" BSP | 250                    | 12,5     | 3       | H        | 45                | 88  | 67   |      | 27    |       | 38,5 |
| C800212 | 3/4" BSP | 250                    | 20       | 4       | H        | 106               | 115 | 84,5 |      | 34    |       | 46   |
| C800216 | 1" BSP   | 200                    | 25       | 5       | H        | 189               | 120 | 95   |      | 41    |       | 58   |