


Llaves de paso alta presión MHA
De 2 vías
Llave 2 vías tubo rígido Serie Ligera

Acero Carbono

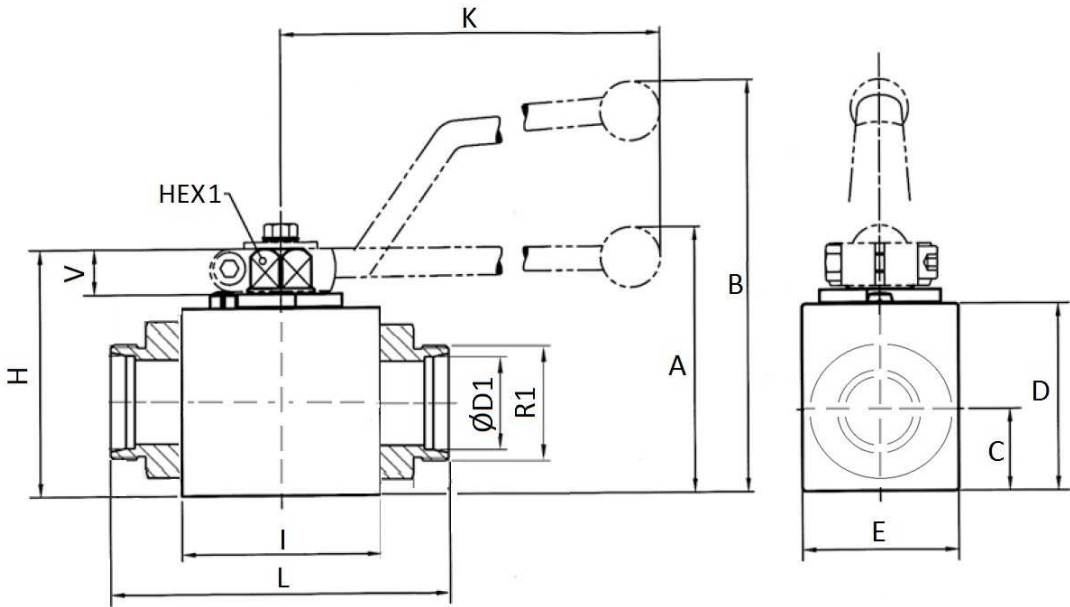

Palanca: Zn
Tmin/Tmax: -20°C/+100°C
Juntas: NBR
Material Asiento Bola POM

Artículo	DN	ØD1	R1	PRESIÓN MAX. (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
BKH 6 L	4	6L	M12x1.5	500	9	-	82	13,5	33	26	47	40	115	67	11
BKH 8 L	6	8L	M14x1.5	500	9	-	82	13,5	33	26	47	40	115	67	11
BKH 10 L	8	10L	M16x1.5	500	9	-	82	13,5	33	26	47	40	115	74	11
BKH 12 L	10	12L	M18x1.5	500	9	-	86	17,5	38	32	52	43	115	74	11
BKH 15 L	13	15L	M22x1.5	500	9	-	89	19	40	35	54	48	115	82	11
BKH 18 L	16	18L	M26x1.5	420	12	-	106	19	46	38	54	48	160	82	13
BKH 22 L	20	22L	M30x2	420	14	79	-	24,5	57	49	75	62	200	101	14
BKH 28 L	25	28L	M36x2	315	14	87	-	29,5	65	58	83	66	200	108	14
BKH 42 L	25/40	42L	M52x2	315	14	87	-	29,5	65	58	83	66	200	112	14