


Llave 2 vías rosca hembra NPT

Acero Carbono

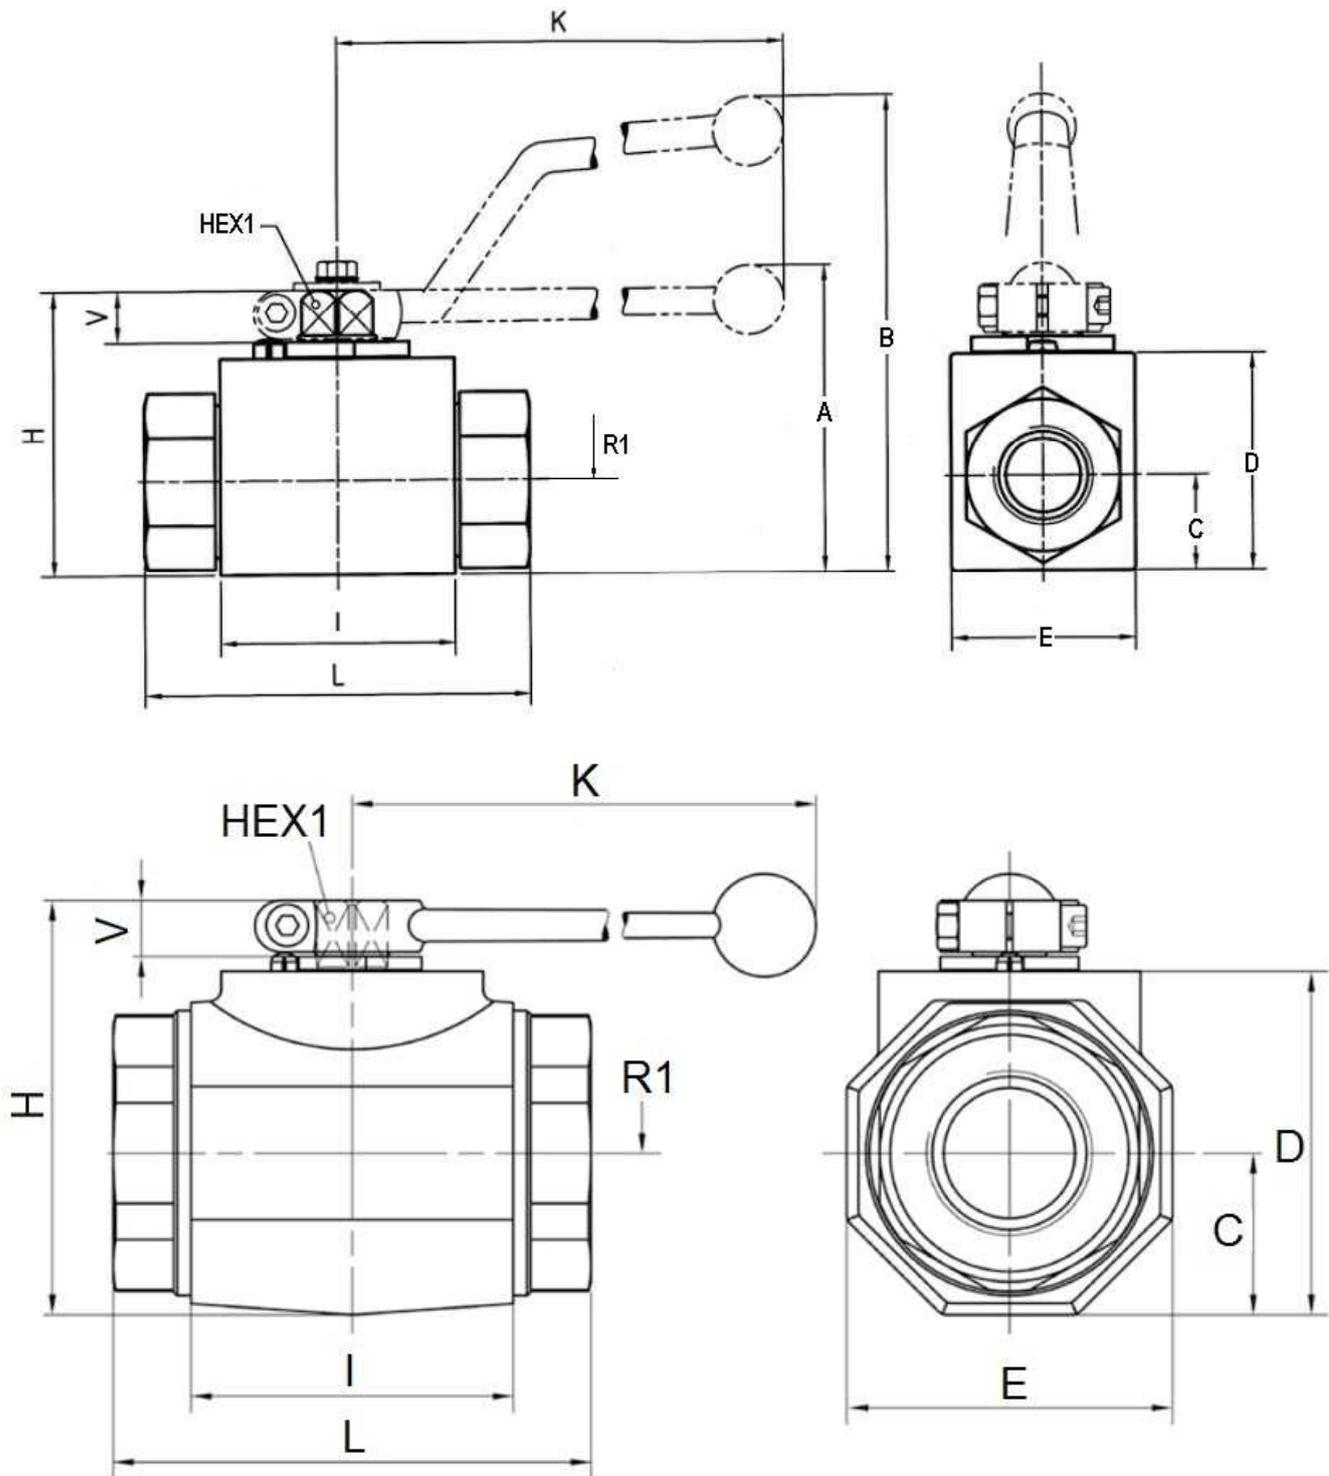

Palanca: Zn

Tmin/Tmax: -20°C/+100°C

Artículo	DN	R1	PRESIÓN MAX. (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
BKH G 1/4 NPT	6	1/4" NPT	500	9	-	82	13,5	33	26	47	40	115	69	11
BKH G 3/8 NPT	10	3/8" NPT	500	9	-	86	17,5	38	32	52	43	115	72	11
BKH G 1/2 NPT	13	1/2" NPT	500	9	-	89	19	40	35	54	48	115	83	11

Llave 2 vías rosca hembra NPT

Acero Carbono

2/2

Artículo	DN	R1	PRESIÓN MAX. (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
BKH G 3/4 NPT	20	3/4" NPT	420	14	79	-	24,5	57	49	75	62	200	95	14
BKH G 1 NPT	25	1" NPT	315	14	87	-	29,5	65	58	83	66	200	113	14
BKH G 1 1/4 NPT	25	1"1/4 NPT	315	14	87	-	29,5	65	58	83	66	200	120	14
BKH G 1 1/2 NPT	25	1"1/2 NPT	250	14	87	-	29,5	65	58	83	66	200	130	14
BKH G 2 NPT	50	2" NPT	420	17	-	-	59	117	118	138	100	320	140	16,5

BKH G 2 NPT: 2ª imagen