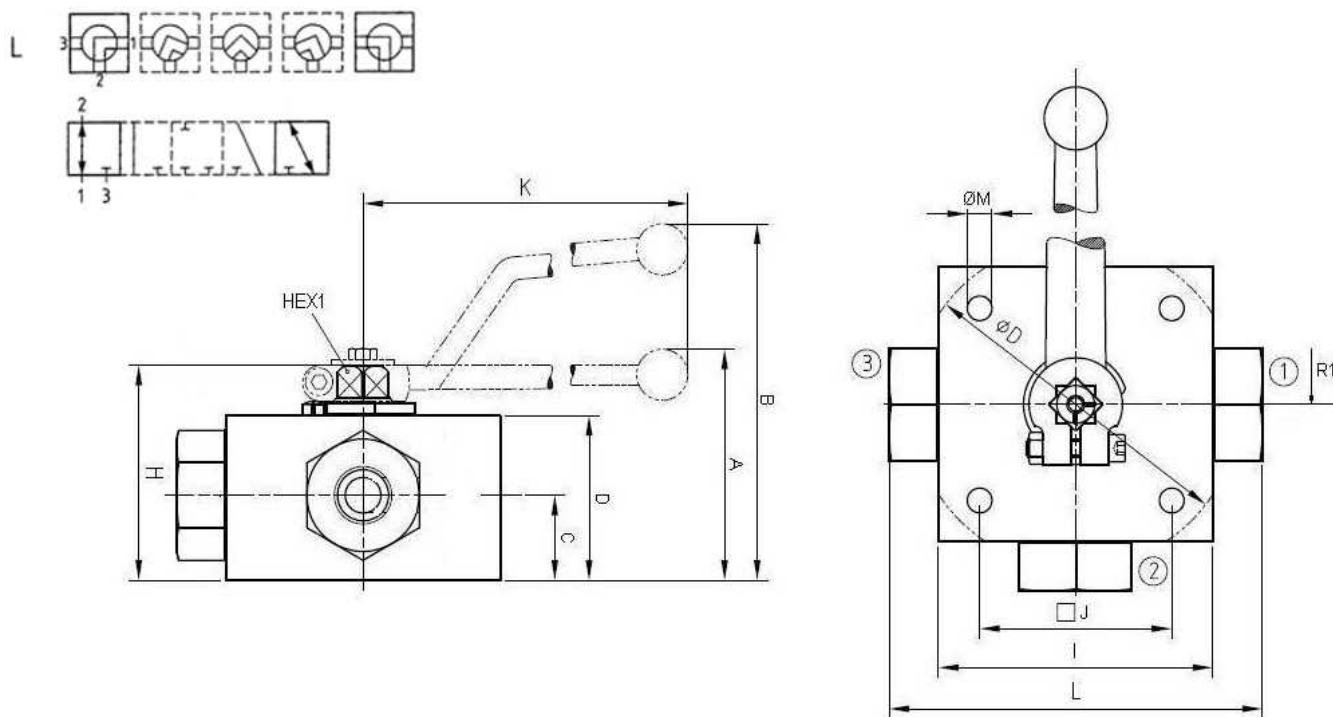


**Multi-way ball valves female 3 ways (Type L)**

Mild Steel

**1/1****Tmin/Tmax: -20°C/+100°C****Standard o-ring: NBR****Ball seat: POM (polyoxy  
methylene)****Handle: Zn**

| Part n°            | DN    | R1        | MAX.<br>PRESSURE<br>(bar) | HEX 1 | ØD  | ØM  | A   | B   | C    | D  | H   | I   | J  | K   | L   |
|--------------------|-------|-----------|---------------------------|-------|-----|-----|-----|-----|------|----|-----|-----|----|-----|-----|
| <b>3KH G 1/8</b>   | 4     | 1/8" BSP  | 500                       | 12    | -   | 6,5 | -   | 101 | 22   | 40 | 58  | 70  | 55 | 160 | 100 |
| <b>3KH G 1/4</b>   | 6     | 1/4" BSP  | 500                       | 12    | -   | 6,5 | -   | 101 | 22   | 40 | 58  | 70  | 55 | 160 | 100 |
| <b>3KH G 3/8</b>   | 10    | 3/8" BSP  | 500                       | 14    | -   | 6,5 | 72  | -   | 27   | 50 | 68  | 80  | 65 | 200 | 115 |
| <b>3KH G 1/2</b>   | 13    | 1/2" BSP  | 400                       | 14    | -   | 9   | 82  | -   | 31   | 60 | 78  | 100 | 80 | 200 | 136 |
| <b>3KH G 3/4</b>   | 20    | 3/4" BSP  | 315                       | 17    | 138 | 8,5 | 96  | -   | 36,5 | 67 | 88  | 113 | 85 | 320 | 154 |
| <b>3KH G 1</b>     | 25    | 1" BSP    | 315                       | 17    | 138 | 8,5 | 112 | -   | 47,5 | 82 | 103 | 119 | 85 | 320 | 172 |
| <b>3KH G 1 1/4</b> | 25/32 | 1"1/4 BSP | 315                       | 17    | 138 | 8,5 | 112 | -   | 47,5 | 82 | 103 | 119 | 85 | 320 | 180 |
| <b>3KH G 1 1/2</b> | 25/40 | 1"1/2 BSP | 250                       | 17    | 138 | 8,5 | 112 | -   | 47,5 | 82 | 103 | 119 | 85 | 320 | 180 |

The input flow can be done through any of the 3 ways