


Rubinetto a sfera 3 vie femmina BSP (tipo L) - multivia

Acciaio al carbonio

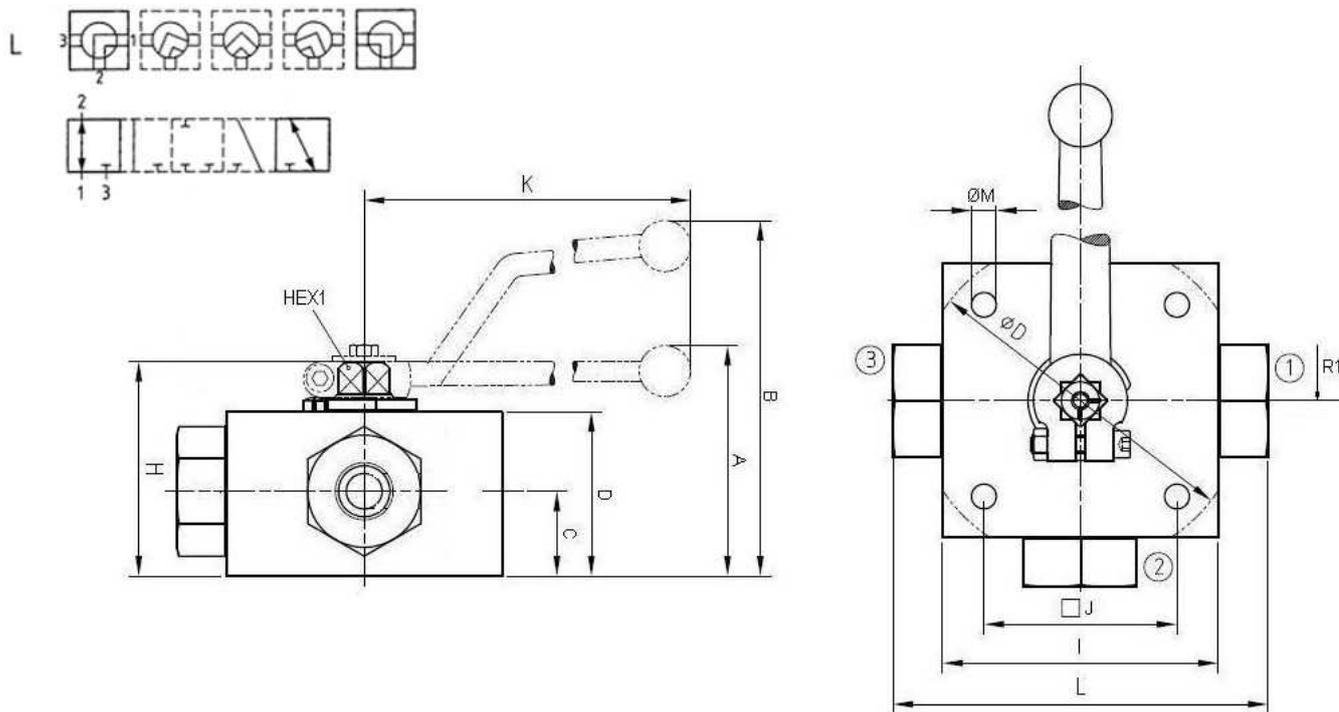

Tmin/Tmas: -20°C/+100°C

Standard o-ring: NBR

Sede della esfera: POM (polioisotilene)

Leva: Zn

Codice	DN	R1	PRESSIONE MAX. (bar)	HEX 1	ØD	ØM	A	B	C	D	H	I	J	K	L
3KH G 1/8	4	1/8" BSP	500	12	-	6,5	-	101	22	40	58	70	55	160	100
3KH G 1/4	6	1/4" BSP	500	12	-	6,5	-	101	22	40	58	70	55	160	100
3KH G 3/8	10	3/8" BSP	500	14	-	6,5	72	-	27	50	68	80	65	200	115
3KH G 1/2	13	1/2" BSP	400	14	-	9	82	-	31	60	78	100	80	200	136
3KH G 3/4	20	3/4" BSP	315	17	138	8,5	96	-	36,5	67	88	113	85	320	154
3KH G 1	25	1" BSP	315	17	138	8,5	112	-	47,5	82	103	119	85	320	172
3KH G 1 1/4	25/32	1"1/4 BSP	315	17	138	8,5	112	-	47,5	82	103	119	85	320	180
3KH G 1 1/2	25/40	1"1/2 BSP	250	17	138	8,5	112	-	47,5	82	103	119	85	320	180

Il flusso in ingresso può essere da qualsiasi dei 3 vie