


Pneum. Zylinder doppeltw. ISO 15556 Ø63

1/1

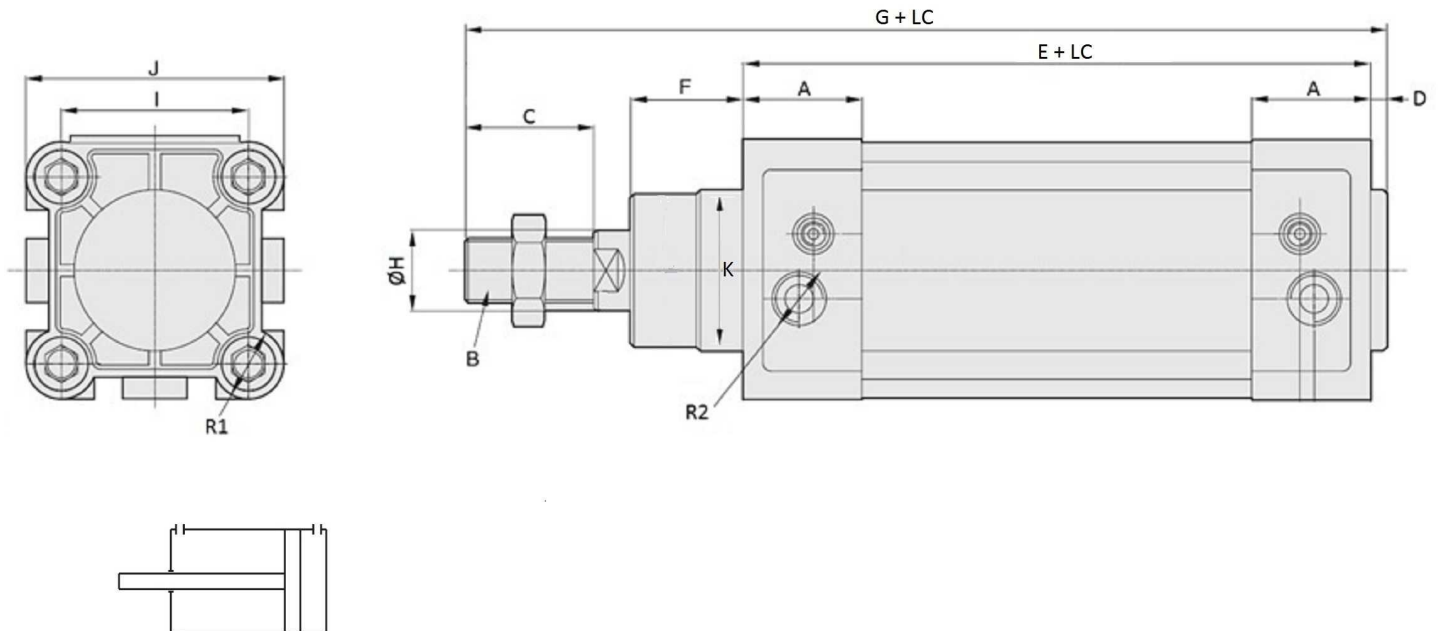

Dämpfung beidseitig einstellbar

Artikel	R1	R2	HUB	ØH	A	B	C	D	E	F	G	I	J	K
CNM0630025	M8	3/8" BSP	25	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630050	M8	3/8" BSP	50	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630075	M8	3/8" BSP	75	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630100	M8	3/8" BSP	100	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630125	M8	3/8" BSP	125	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630150	M8	3/8" BSP	150	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630160	M8	3/8" BSP	160	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630200	M8	3/8" BSP	200	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630250	M8	3/8" BSP	250	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630300	M8	3/8" BSP	300	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630320	M8	3/8" BSP	320	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630350	M8	3/8" BSP	350	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630400	M8	3/8" BSP	400	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630450	M8	3/8" BSP	450	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630500	M8	3/8" BSP	500	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45

Hub = LC = Hublänge