


Industrieschläuche INDUSTrAle

Schweißschläuche

Zwillingsschlauch für Schweißen, Sauerstoff-Acetylen

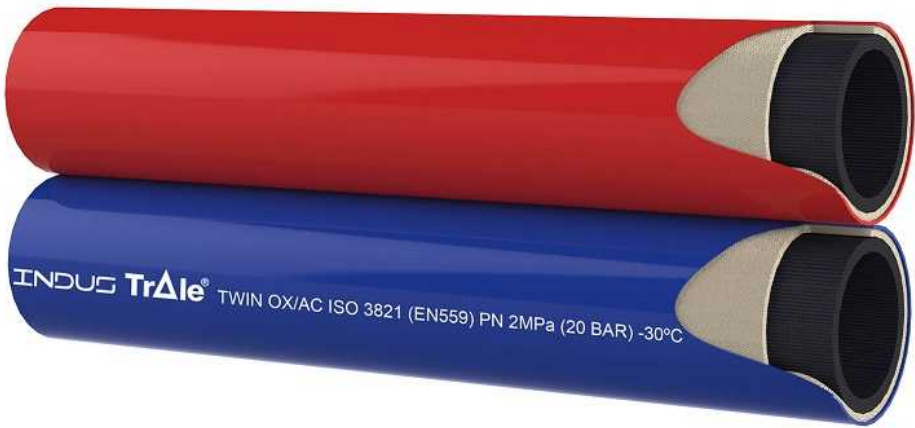

Application: Blue hose – a flexible hose for transporting oxygen for welding & cutting. Red hose – a flexible hose for transporting acetylene for welding & cutting. Both for arc welding using shielding gas and related processes. Also suitable for H, CO2, Ar & N.

Composition: Tube: EPDM, black, smooth.
Reinforcement: Textile spiral construction.
Cover: EPDM, blue and red, smooth.

Temperature range: -30°C / +70°C

Safety factor: 3 : 1

Standard/approval: ISO 3821:2008 (formerly EN 559:2003).

Artikel	Ø int	Ø ext	Betriebs- Druck (bar)	Betriebs- Druck (psi)	Platz- Druck (bar)	Platz- Druck (psi)	Biege- Radius (mm)	Gewicht (kg/m)
MI0601060612	6,3	12,3	20	300	60	870	40	0,31
MI0601080814	8	14	20	300	60	870	40	0,37
MI0601101016	10	16	20	300	60	870	50	0,43