


CAMLOCK DIN EN 14420-7

CAMLOCK aluminio

## CAMLOCK aluminio macho - rosca macho BSPT Tipo F

Página: 1/1

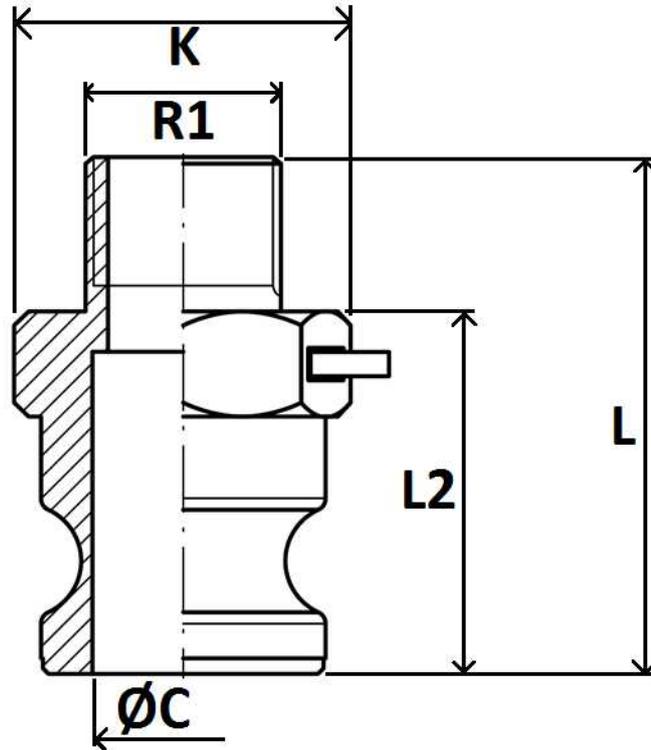

**Normas:** EN 14420-7 / DIN 2828

**PN:** 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Artículo	DN	R1	L	L2	ØC	K
ALF012	12	1/2"	60	40	15	25
ALF020	20	3/4"	61,3	42	21	32
ALF025	25	1"	72	51,2	24	38
ALF032	32	1" 1/4	80	54	29	48
ALF040	40	1" 1/2	78,5	56,5	37	57
ALF050	50	2"	87	62,5	47	66
ALF065	65	2" 1/2	95,7	67	57	82
ALF080	80	3"	98,5	68	73,5	94
ALF100	100	4"	111,5	75,5	101	120

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.