


CAMLOCK DIN EN 14420-7
CAMLOCK latón
CAMLOCK latón macho - rosca hembra Tipo A

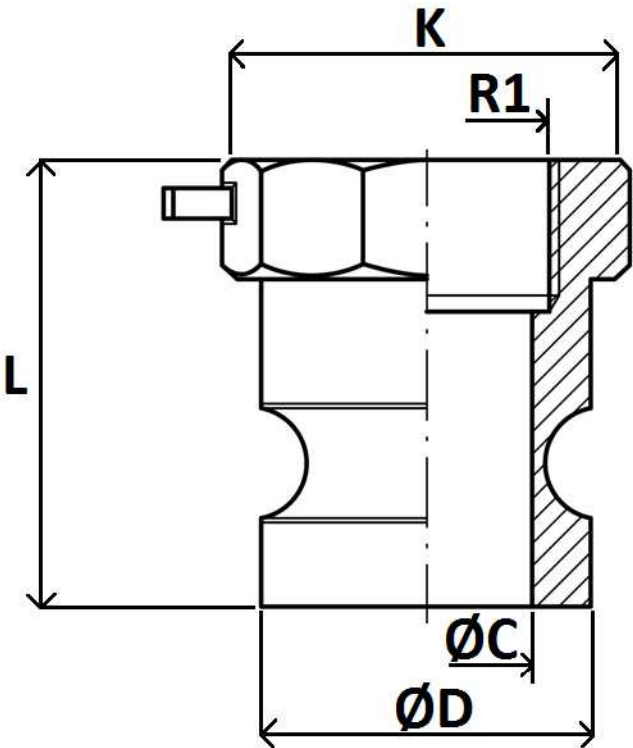

Normas: EN 14420-7 / DIN 2828
PN: 1/2 "- 4" 150 PSI ----- 5 "- 6" 75 PSI

Artículo	DN	R1	L	ØC	ØD	K
BRA012	12	1/2"	37.54	14,5	24.06	26,11
BRA020	20	3/4"	37.17	24,3	31.86	32,04
BRA025	25	1"	45.37	28,7	36.43	37,17
BRA032	32	1" 1/4	51.72	35,8	45.41	49,36
BRA040	40	1" 1/2	52.40	44,5	53.37	54,43
BRA050	50	2"	60.81	52,9	63.01	64,13
BRA065	65	2" 1/2	62.52	65	75.7	79,55
BRA080	80	3"	69.24	79,3	91.5	93,2
BRA100	100	4"	69.51	102,2	119.57	121,9

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.