


Gr. II Bomba engranaje/Tapa eur/eje cónico 1:8 / Brida roscada

Página: 1/1

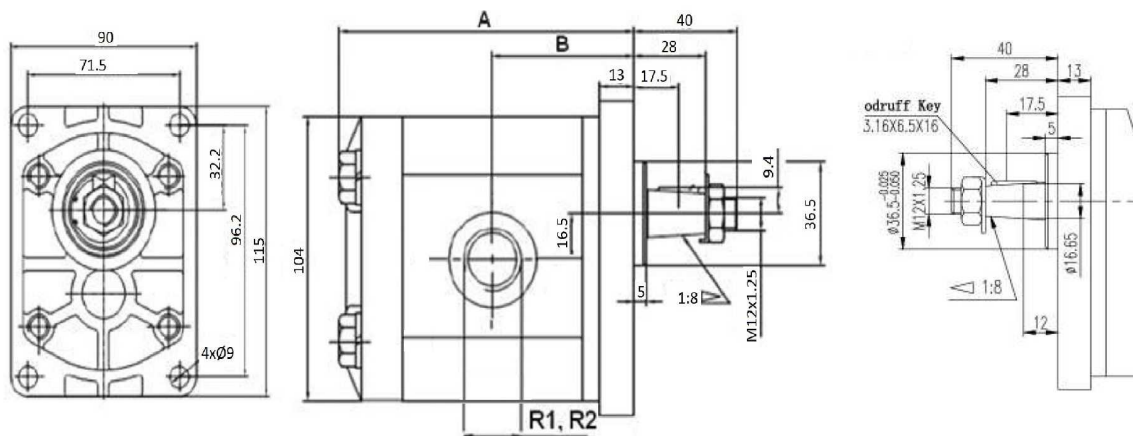

Referencia giro: BTD...I=Referencia giro izquierda
BTD...D=Referencia giro derecha

Min 500 rpm

Brida y tapa: Aluminio

Artículo	R1	R2	Pres. max. (bar)	Pres. punta (bar)	R.P.M. Max	cm ³ / rev	A	B
BTD240D01	1/2" BSP	1/2" BSP	250	300	3500	4	95,5	43,3
BTD260D01	1/2" BSP	1/2" BSP	250	300	3500	6	99	45
BTD280D01	1/2" BSP	1/2" BSP	250	300	3500	8	102	46,5
BTD2100D01	1/2" BSP	1/2" BSP	250	300	3500	10	105	48
BTD2120D01	1/2" BSP	1/2" BSP	250	300	3500	12	108	49,5
BTD2140D01	3/4" BSP	1/2" BSP	250	300	3500	14	111	51
BTD2160D01	3/4" BSP	1/2" BSP	250	300	3500	16	114	52,5
BTD2200D01	3/4" BSP	1/2" BSP	250	300	3500	20	121	56
BTD2230D01	3/4" BSP	1/2" BSP	200	250	3000	23	125,5	58,3
BTD2250D01	3/4" BSP	1/2" BSP	200	250	3000	25	128	59,5
BTD2280D01	3/4" BSP	1/2" BSP	160	200	3000	28	133	62
BTD2300D01	3/4" BSP	1/2" BSP	160	200	3000	30	136	63,5

(*) R1 = aspiración; R2 = presión
DECIBELIOS: 70 dB
Par de apriete 45-50 Nm