



Distributeur 3/8 BSP, 50L/min, commande manuelle, retour au centre par ressort. Limit. press.



TYPE	E		F		Weight	
	mm	in	mm	in	kg	lb
YFM50/1	88	3.46	60	2.36	2.50	5.5
YFM50/2	133	5.24	97	3.82	4.10	9.0
YFM50/3	168	6.61	132	5.20	5.5	12.1
YFM50/4	203	7.99	167	6.6	6.90	15.2
YFM50/5	238	9.4	202	8.0	8.30	18.3
YFM50/6	273	10.7	237	9.3	9.70	21.4
YFM50/7	308	12.1	272	10.7	11.10	24.5
YFM50/8	343	13.5	307	12.1	12.50	27.6

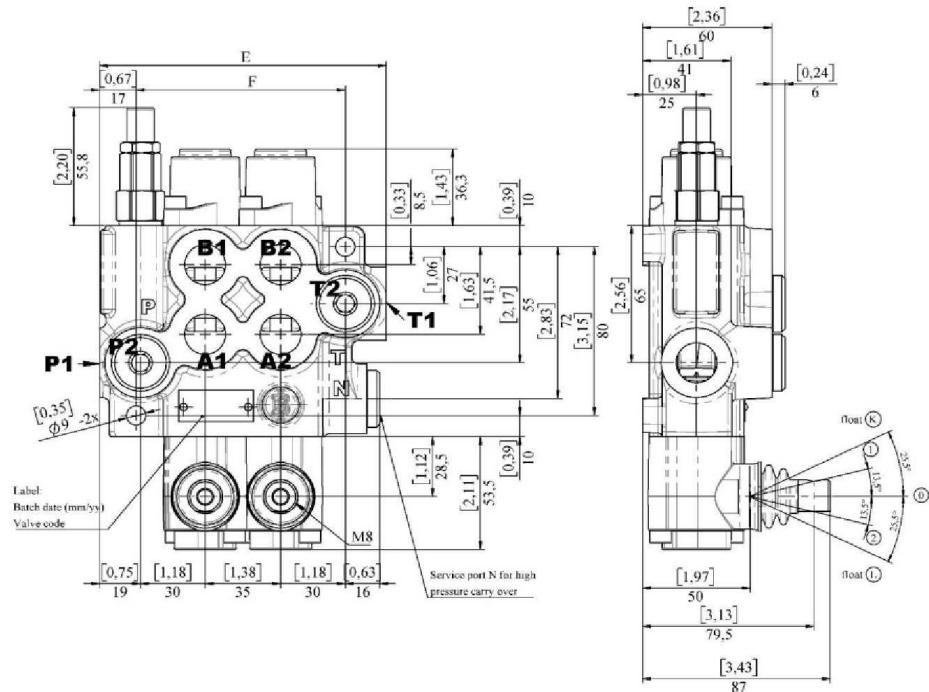

P/T 1/2« - A/B 3/8 »
filetage

Référence	Détails	FILETAGE D'ENTRÉE/SORTIE	Débit max. (l/min)	Press. max. (bar)	Nº leviers
YFM50/1 3/8 1P DE	D/A	3/8" BSP	50	250	1
YFM50/1 3/8 1P SE	S/A	3/8" BSP	50	250	1
YFM50/2 3/8 2P DD	D/A	3/8" BSP	50	250	2
YFM50/3 3/8 3P DDD	D/A	3/8" BSP	50	250	3
YFM50/4 3/8 4P DDDD	D/E	3/8" BSP	50	250	4
YFM50/5 3/8 5P DDDDD	D/E	3/8" BSP	50	250	5
YFM50/6 3/8 6P DDDDDD	D/E	3/8" BSP	50	250	6

*Pour les leviers 7 et 8, nous consulter.