


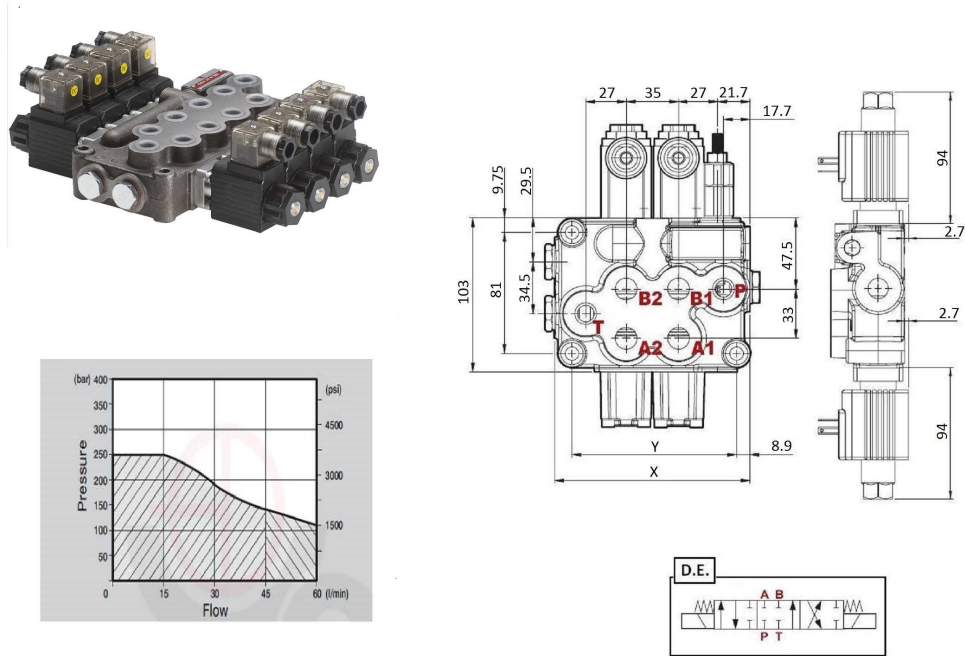

R1 = P, T, B1, B2, A1, A2

Bobina · Tolerancia en Voltaje Nominal: ±10%
· Potencia: 36W

Caudal nominal 45 l/min

Presión de retorno 25 bar

Campo regulación limitadora 63-200 bar

Artículo	R1	Voltaje (V)	Tipo	Caudal máx. (l/min)	Pres. max. (bar)	Nº elementos	X	Y
YE45/1 3/8 1P DE	3/8" BSP	12 VDC	D.E.	45	250	1	93,5	73
YE45/1 3/8 1P DE 24V	3/8" BSP	24 VDC	D.E.	45	250	1	93,5	73
YE45/2 3/8 2P DD	3/8" BSP	12 VDC	D-D	45	250	2	130,5	110
YE45/2 3/8 2P DD 24V	3/8" BSP	24 VDC	D-D	45	250	2	130,5	110
YE45/3 3/8 3P DDD	3/8" BSP	12 VDC	D-D-D	45	250	3	165,5	147
YE45/3 3/8 3P DDD 24V	3/8" BSP	24 VDC	D-D-D	45	250	3	165,5	147
YE45/4 3/8 4P DDDD	3/8" BSP	12 VDC	D-D-D-D	45	250	4	202,5	184
YE45/4 3/8 4P DDDD 24V	3/8" BSP	24 VDC	D-D-D-D	45	250	4	202,5	184
YE45/5 3/8 5P DDDDD	3/8" BSP	12 VDC	D-D-D-D-D	45	250	5	239,5	221
YE45/5 3/8 5P DDDDD 24V	3/8" BSP	24 VDC	D-D-D-D-D	45	250	5	239,5	221
YE45/6 3/8 6P DDDDDD	3/8" BSP	12 VDC	D-D-D-D-D-D	45	250	6	276,5	258
YE45/6 3/8 6P DDDDDD 24V	3/8" BSP	24 VDC	D-D-D-D-D-D	45	250	6	276,5	258