
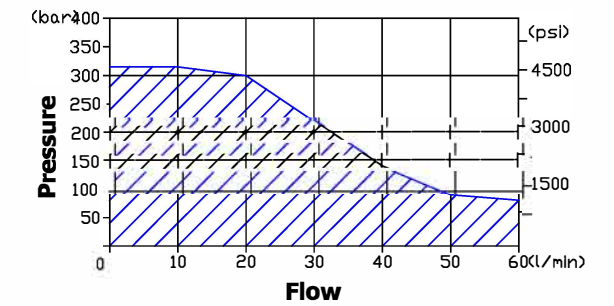


YEMC50.....-ND

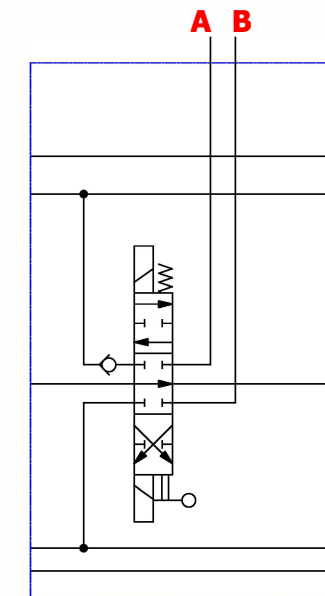

線圈規格		
Sanard Voltage 電壓	12VDC	24VDC
Electric Power 功率	60W	60W
Protection Class 防護等級	IP65	IP65

Nominal flow rating 流量		50 L/min	13 US gpm
Operating pressure (Max.) 使用壓力(最大)		315 bar	4600 psi
Back pressure (Max.) 背壓(最大)	on outlet port T 回油口T	25 bar	360 psi
Fluid temperature 流體溫度	with NBR seals O環(NBR)	-20°C ~ 80°C	-4°F ~ 176°F
	with FPM seals O環(FPM)	-20°C ~ 100°C	-4°F ~ 212°F
Viscosity 黏度係數	Operating range 建議使用範圍	15mm ² /s ~ 75mm ² /s	15 ~ 75 cst
	Max. 最大	400mm ² /s	400 cst
	Min. 最小	12mm ² /s	12 cst
Ambient temperature 環境溫度範圍		-40°C ~ 60°C	-40°F ~ 140°F

Standard threads 螺紋規範

PORTS □位	BSP
A and B ports 工作□	G 3/8
