

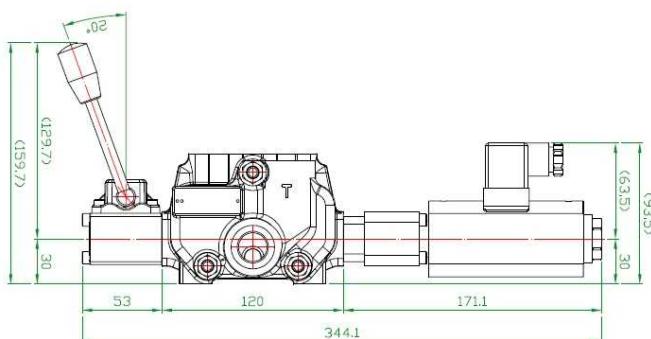


Corpo distributore centrale YEMC50

1/1

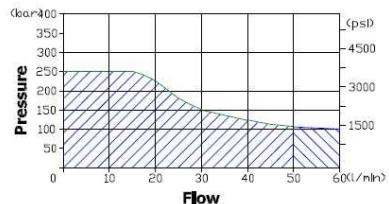

Nominal flow rating	流量	50 L/min	13 US gpm
Operating pressure (Max.)	使用壓力(最大)	315 bar	4600 psi
Back pressure (Max.)	on outlet port T 背壓(最大)	25 bar	360 psi
Fluid temperature	流體溫度	-20°C ~ 80°C with NBR seals O環(NBR)	-4°F ~ 176°F
		-20°C ~ 100°C with FPM seals O環(FPM)	-4°F ~ 212°F
Viscosity	建議使用範圍 黏度係數	15mm ² /s ~ 75mm ² /s Max. 最大 Min. 最小	15 ~ 75 cst 400mm ² /s 12mm ² /s
Ambient temperature	環境溫度範圍	-40°C ~ 60°C	-40°F ~ 140°F

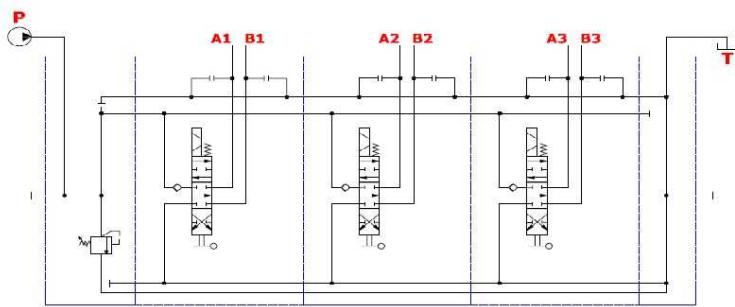

Codice	Dettagli
YEMC50DE12DC-ND	12 VDC
YEMC50M12DC-ND	12 VDC
YEMC50DE24DC-ND	24 VDC
YEMC50M24DC-ND	24 VDC
YEMC50DE12DC	12 VDC
YEMC50M12DC	12 VDC
YEMC50DE24DC	24 VDC
YEMC50M24DC	24 VDC