



Distributore elettrico 3/8 BSP, 50 l/min

1/1



Nominal flow rate: 50 l/min
 Operating pressures:
 @ port P - 250 bar
 @ port A, B - 300 bar
 @ port T - 50 bar

Port threads:
 Port P - BSP G 1/2"
 Port A, B - BSP G 3/8"
 Port T - BSP G 1/2"
 Port N - BSP G 1/2"

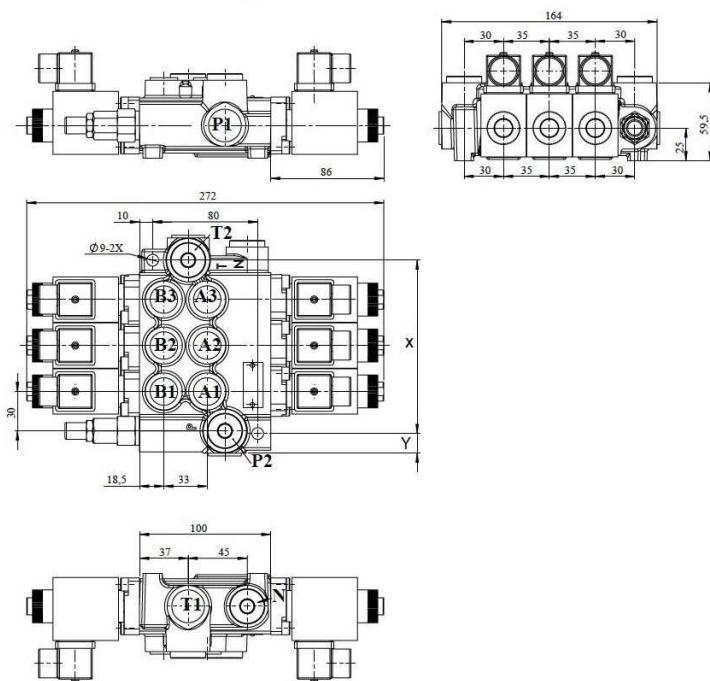

Codice	R1	Portata max. (l/min)	Press. max.	Leve	Voltaggio (V)	X	Y
YFME50/1 3/8 1P DE	3/8" BSP	50	250	1	12 VDC	93	17
YFME50/2 3/8 2P DD	3/8" BSP	50	250	2	12 VDC	97	15
YFME50/3 3/8 3P DDD	3/8" BSP	50	250	3	12 VDC	132	15