
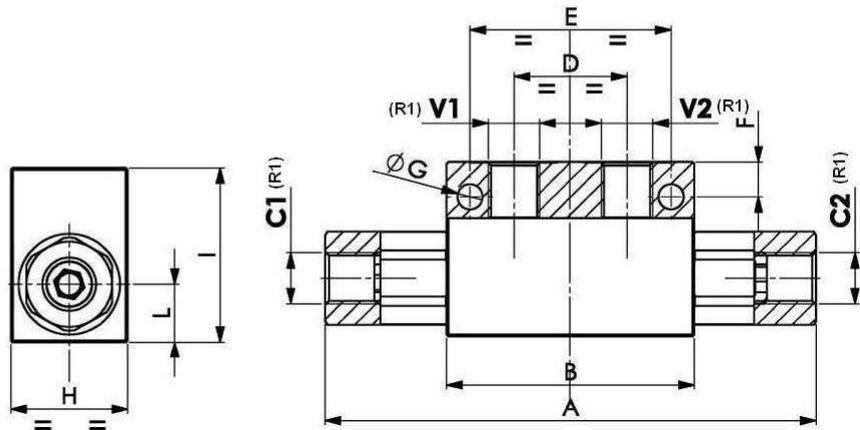



## Válvula antirretorno doble pilotaje bloque (en T)

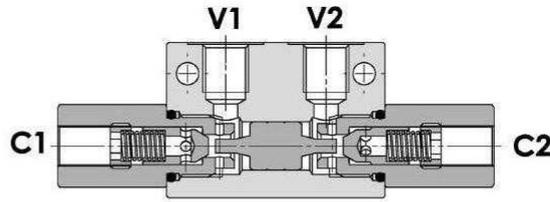

**Material** Cuerpo de Acero

**Presión de Apertura** 2 bar

| Artículo   | R1       | Caudal máx. (l/min) | Pres. máx. (bar) | Ratio pilotaje | L  | ØG  | A   | B    | D  | E    | F  | H  | I  |
|------------|----------|---------------------|------------------|----------------|----|-----|-----|------|----|------|----|----|----|
| VT008004   | 1/4" BSP | 12                  | 350              | 1 : 4          | 15 | 6,5 | 126 | 63,6 | 29 | 51,6 | 9  | 30 | 45 |
| VT008006   | 3/8" BSP | 30                  | 300              | 1 : 6          | 20 | 8   | 158 | 90   | 40 | 75   | 17 | 40 | 60 |
| VT00800620 | 3/8" BSP | 20                  | 300              | 1 : 4          | 15 | *   | 126 | 63,6 | 29 | *    | *  | 30 | 45 |
| VT008008   | 1/2" BSP | 45                  | 300              | 1 : 6          | 20 | 8   | 174 | 90   | 40 | 75   | 17 | 40 | 60 |

\* La válvula VT00800620 no dispone de agujeros de fijación