


Hydraulic valves


Pressure relief valves

## Dual cross direct acting steel relief valve screw adjust

Page: 1/1



MODEL	G	L1	L2	L3	H	P	M	D	I
LDL3/8**	G3/8	205	85	38	30	54	70	9	S4
LDL1/220	G1/2	216	85	44	32	60	88	9	S4

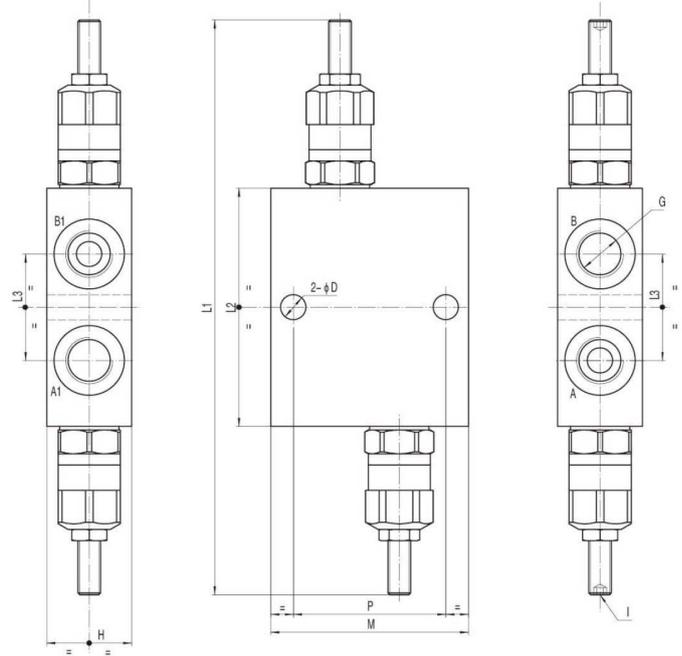

Part n°	R1	FLOW MAX (l/min)	MAX. PRESSURE (bar)	Setting (bar)	Reg. rate (bar)
<b>LDL3/810</b>	3/8" BSP	45	315	100	0-100
<b>LDL3/820</b>	3/8" BSP	45	315	5	70-210
<b>LDL3/835</b>	3/8" BSP	45	315	100	100-315
<b>LDL1/205</b>	1/2" BSP	60	315	30	0-50
<b>LDL1/210</b>	1/2" BSP	60	315	70	0-100
<b>LDL1/220</b>	1/2" BSP	60	315	70	70-210
<b>LDL1/235</b>	1/2" BSP	60	315	100	100-315