
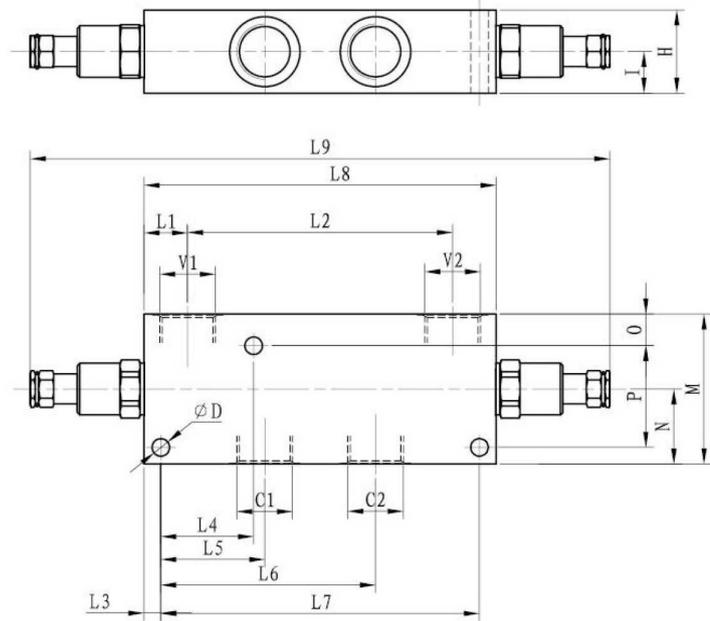


Hydraulic valves

Overcenter valves

## Double pilot operated check valve in block (in T), with fittings

Page: 1/1



| MODEL     | L1 | L2 | L3 | L4 | L5 | L6 | L7  | L8  | L9  | O | P  | N  | M  | I  | H  | φD | V1<br>V2 | C1<br>C2 |
|-----------|----|----|----|----|----|----|-----|-----|-----|---|----|----|----|----|----|----|----------|----------|
| OBDL3/8** | 18 | 94 | 10 | 32 | 34 | 76 | 110 | 130 | 229 | 6 | 40 | 28 | 56 | 15 | 30 | 7  | G3/8"    |          |

| Part n°          | R1       | FLOW MAX (l/min) | MAX. PRESSURE (bar) | Reg. rate (bar) | Pilot ratio |
|------------------|----------|------------------|---------------------|-----------------|-------------|
| <b>OBDL3/820</b> | 3/8" BSP | 50               | 315                 | 60-210          | 4.3:1       |
| <b>OBDL3/835</b> | 3/8" BSP | 50               | 315                 | 100-315         | 4.3:1       |