


Flow dividers with phase correcting valves- group 1

Page: 1/2

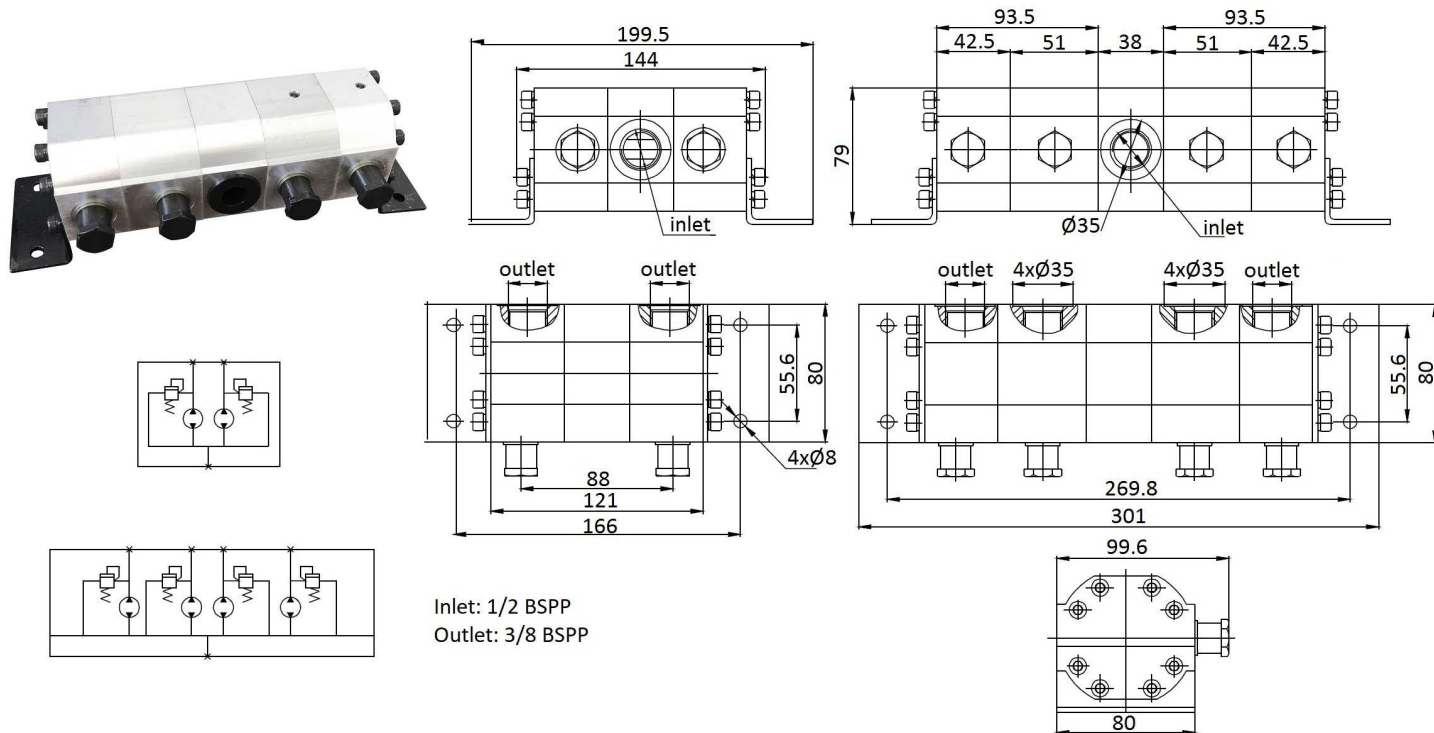

*Flow per body

Valve pressure range: 0 - 250 bar

Group 1: inlet 1/2", outlet 3/8"

Group 2: inlet 3/4", outlet 1/2"

Valve set at 160 bar

Part n°	*Min. flow (l/min)	*Max. flow (l/min)	Max. Press. (bar)	cm ³ /body	N° bodies
DEV116X2	3	6.4	240	1.6	2
DEV116X4	3	6.4	240	1.6	4
DEV121X2	4,5	9.5	240	2.1	2
DEV121X4	4,5	9.5	240	2.1	4
DEV131X2	6,4	13.2	240	3.1	2
DEV131X4	6,4	13.2	240	3.1	4
DEV142X2	9,5	18.9	240	4.2	2
DEV142X4	9,5	18.9	240	4.2	4
DEV152X2	11,4	22.7	240	5.2	2
DEV152X4	11,4	22.7	240	5.2	4
DEV163X2	13,2	26.5	240	6.3	2
DEV163X4	13,2	26.5	240	6.3	4
DEV174X2	15,1	30.3	240	7.4	2
DEV174X4	15,1	30.2	240	7.4	4
DEV184X2	17	34.1	240	8.4	2
DEV184X4	17	34.1	240	8.4	4



Gear flow dividers

Gear Flow divider with valves

Flow dividers with phase correcting valves- group 1

Page: 2/2

Part n°	*Min. flow (l/min)	*Max. flow (l/min)	Max. Press. (bar)	cm ³ /body	N° bodies
---------	-----------------------	-----------------------	-------------------	-----------------------	-----------

*** Review attached PDF***

The tightening torque is 13-16 Nm.