


Electric motors

Electric motors three-phase current (220/380v)-1500 rpm

Three-phase electric motor with flange and legs (B3B5), IE3

Page: 1/2

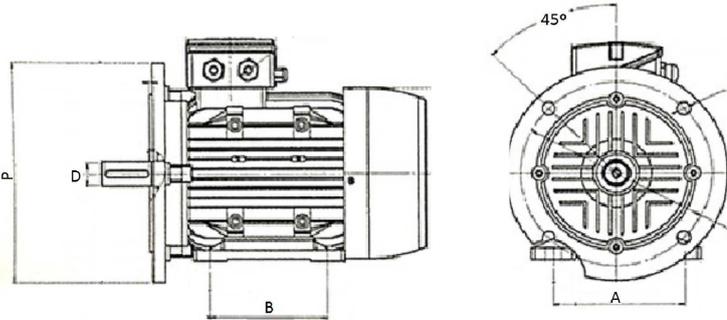

REF	TYPE	A	B	D	P
MET0.75B3B5 H / MET1B3B5 H	80	125	100	19	200
MET1.5B3B5 H	90S	140	100	24	200
MET2B3B5 H	90L	140	125	24	200
MET3B3B5 H / MET4B3B5 H	100L	160	140	28	250
MET5.5B3B5 H	112M	190	140	28	250
MET7.5B3B5 H	132S	216	140	38	300
MET10B3B5 H	132M	216	178	38	300
MET15B3B5 H	160M	254	210	42	350
MET20B3B5 H	160L	254	254	42	350

0-10CV: Aluminium (removable legs)

15-30CV: Molten body (welded legs)

230V: 3.06 Amp

400V: 1.77 Amp

230/400V: 50 Hz

440V: 60 Hz

Insulation Class: F

Protection: IP55

Cooling: IC411

Part n°	Voltage (V)	Shaft	Flange diam.	R.P.M.	POWER (HP)
MET1B3B5 H	230/400	19	200	1500	1
MET1.5B3B5 H	230/400	24	200	1500	1,5
MET2B3B5 H	230/400	24	200	1500	2
MET3B3B5 H	230/400	28	250	1500	3
MET4B3B5 H	230/400	28	250	1500	4
MET5.5B3B5 H	230/400	28	250	1500	5.5
MET7.5B3B5 H	230/400	38	300	1500	7,5
MET10B3B5 H	400/690	38	300	1500	10
MET15B3B5 H	400/690	42	350	1500	15
MET20B3B5 H	400/690	42	350	1500	20
MET30B3B5 H	400/690	48	350	1500	30



Electric motors

Electric motors three-phase current (220/380v)-1500 rpm

**Three-phase electric motor with flange and legs
(B3B5), IE3**

Page: 2/2

Part n°	Voltage (V)	Shaft	Flange diam.	R.P.M.	POWER (HP)
---------	-------------	-------	--------------	--------	------------

*** Review attached PDF***