


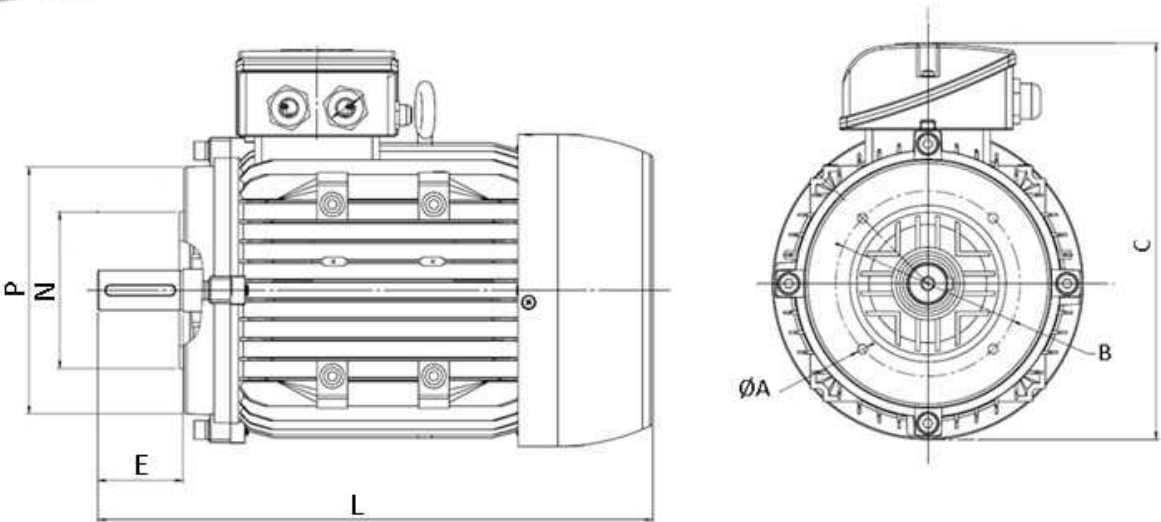

Artículo	Voltaje (V)	Eje / Ejes	R.P.M. (max)	Potencia (CV)	ØA	B	C	E	L	N	P
MET1B14 H	230/400	19	1500	1	M6	100	208	40	290	80	120
MET2B14 H	230/400	24	1500	2	M8	115	227,5	50	350	95	140
MET3B14 H	230/400	28	1500	3	M8	130	255	60	398	110	160
MET4B14 H	230/400	28	1500	4	M8	130	255	60	398	110	160
MET5.5B14 H	230/400	28	1500	5.5	M8	130	275,5	60	447	110	160

*** Revisar PDF adjunto ***

50 Hz --- 230/400V
60 Hz --- 440V
Tipo aislamiento: F
Proteccion: IP55