



Electric motors

Electric motors three-phase current (220/380v)-1500 rpm

Three-phase electric motor with flange and legs (B3B5) IE2

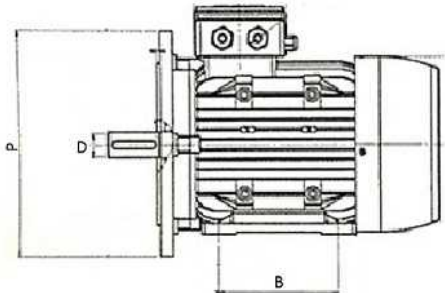

REF	TYPE	A	B	D	P
MET2B3B5IE2 H	90L	125	100	19	200
MET3B3B5IE2 H	100L	140	100	24	200
MET4B3B5IE2 H	100L	140	125	24	200
MET5.5B3B5IE2 H	112M	160	140	28	250
MET7.5B3B5IE2 H	132S	190	140	28	250

- 0-10CV:** Aluminium (removable legs)
- 15-30CV:** Molten body (welded legs)
- 230/400V:** 50 Hz
- 440V:** 60 Hz
- Insulation** Class: F
- Protection:** IP55
- Cooling:** IC411

Part n°	Voltage (V)	Shaft	Flange diam.	R.P.M.	POWER (HP)
MET0.25B3B5 H	230/400	11	140	1500	0,25
MET0.33B3B5 H	230/400	14	160	1500	0,33
MET0.5B3B5 H	230/400	14	160	1500	0,5
MET3B3B5IE2 H	230/400	28	250	1500	3
MET0.75B3B5 H	230/400	19	200	1500	0,75
MET2B3B5IE2 H	230/400	24	200	1500	2
MET4B3B5IE2 H	230/400	28	250	1500	4
MET5.5B3B5IE2 H	230/400	28	250	1500	5.5
MET7.5B3B5IE2 H	230/400	38	300	1500	7.5

*** Review attached PDF***