

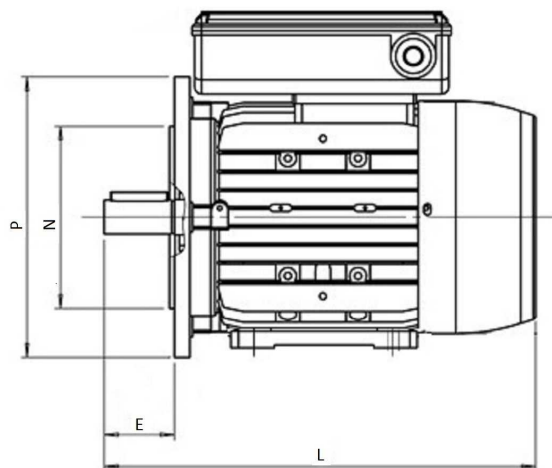


Einphasen-Motoren H.T. mit Flansch und Füßen (B3B5)

1/1

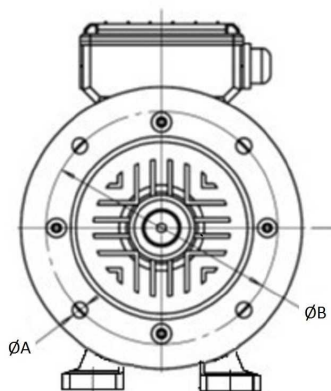

Artikel	Spannung	Achse	Durchmesser flansch (mm)	U/min (max)	Arbeit	ØA	B	E	L	N	P
MEMAP0.33B3B5 H	220V / 50Hz	14	160	1500	0.37	10	130	30	255	110	160
MEMAP0.5B3B5 H	220V / 50Hz	14	160	1500	0.5	10	130	30	255	110	160
MEMAP0.75B3B5 H	220V / 50Hz	19	200	1500	0.75	12	165	40	290	130	200
MEMAP1B3B5 H	220V / 50Hz	19	200	1500	1	12	165	40	290	130	200
MEMAP1.5B3B5 H	220V / 50Hz	24	200	1500	1.5	12	165	50	335	130	200
MEMAP2B3B5 H	220V / 50Hz	24	200	1500	2	12	165	50	365	130	200
MEMAP3B3B5 H	220V / 50Hz	28	250	1500	3	15	215	60	398	180	250

Isolationsklasse: F
Schutzart: IP55
Kühlung: IC411