
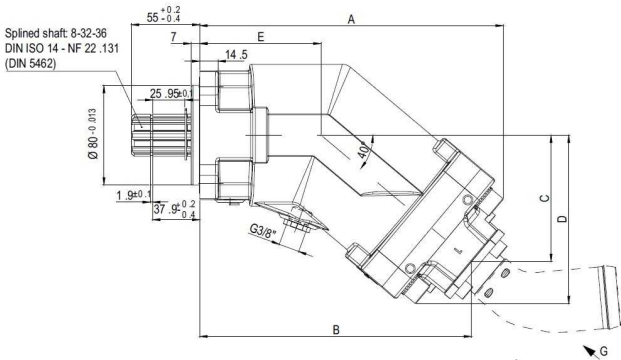


Artikel	R1	R2	Betriebs- Druck (bar)	Druck max. (bar)	Rotation max (350 bar)	Umdrehungen geschwindigkeit (1/min)	Nenn- leistung (cm ³)	A	B	C
MPT12	3/4" BSP	3/4" BSP	400	450	66 Nm	8000	12	197	107,5	54
MPT18	3/4" BSP	3/4" BSP	400	450	98 Nm	8000	18	197	107,5	54
MPT25	3/4" BSP	3/4" BSP	400	450	140 Nm	6250	25	197	107,5	54
MPT32	3/4" BSP	3/4" BSP	400	450	174 Nm	6250	32	202	107,5	54
MPT40	3/4" BSP	3/4" BSP	400	450	228 Nm	5600	40	202	107,5	54
MPT50	3/4" BSP	3/4" BSP	400	450	280 Nm	5000	50	214	107,5	54
MPT63	3/4" BSP	3/4" BSP	400	450	350 Nm	5000	63	214	107,5	54
MPT80	1" BSP	1" BSP	400	450	440 Nm	4400	80	240	122,5	60
MPT108	1" BSP	1" BSP	400	450	600 Nm	4000	108	240	122,5	60
MPT130	1" BSP	1" BSP	400	450	710 Nm	3400	130	240	122,5	60

*** Review attached PDF***
Diese Motoren können mit mindestens 100 U/min betrieben werden