
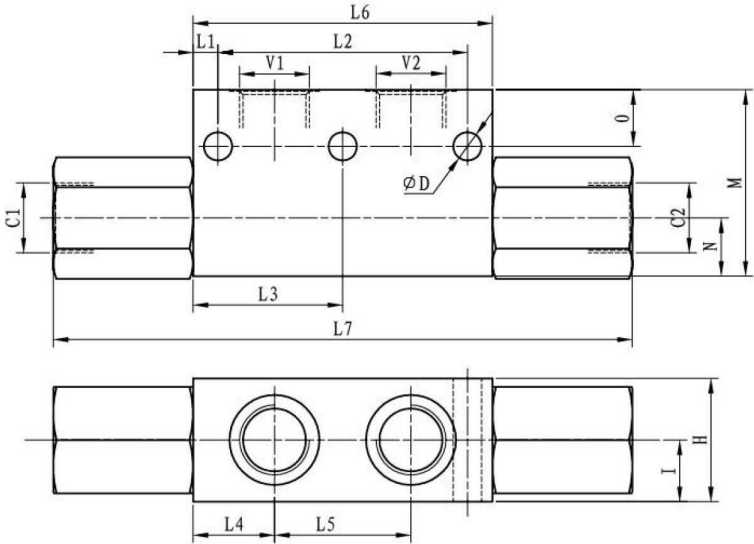




Válvula antirretorno doble bloque pilotado (en Te)



MODEL	L1	L2	L3	L4	L5	L6	L7	O	N	M	I	H	φ D	V1 C1 V2 C2
ADP1/4	-	-	32.2	17.5	29	63	130	8	14.5	43	14.5	29	6.4	G1/4"
ADP3/8	-	-	32	17	30	64	150	9	13	40	15	30	6	G3/8"
ADP1/2	7.5	75	-	24.5	41	90	174	17	17.5	56	18.5	37	8.5	G1/2"

Material: Acero

Artículo	R1	Caudal máx. (l/min)	Pres. max. (bar)	Ratio pilotaje
ADP1/4	1/4" BSP	15	315	4:1
ADP3/8	3/8" BSP	35	315	5.2:1
ADP1/2	1/2" BSP	50	315	4.3:1