


SERIE SERIES SÉRIE S


TIPO-TYPE SN-SR-SRL-SE




STEEL-ACIER-ACERO

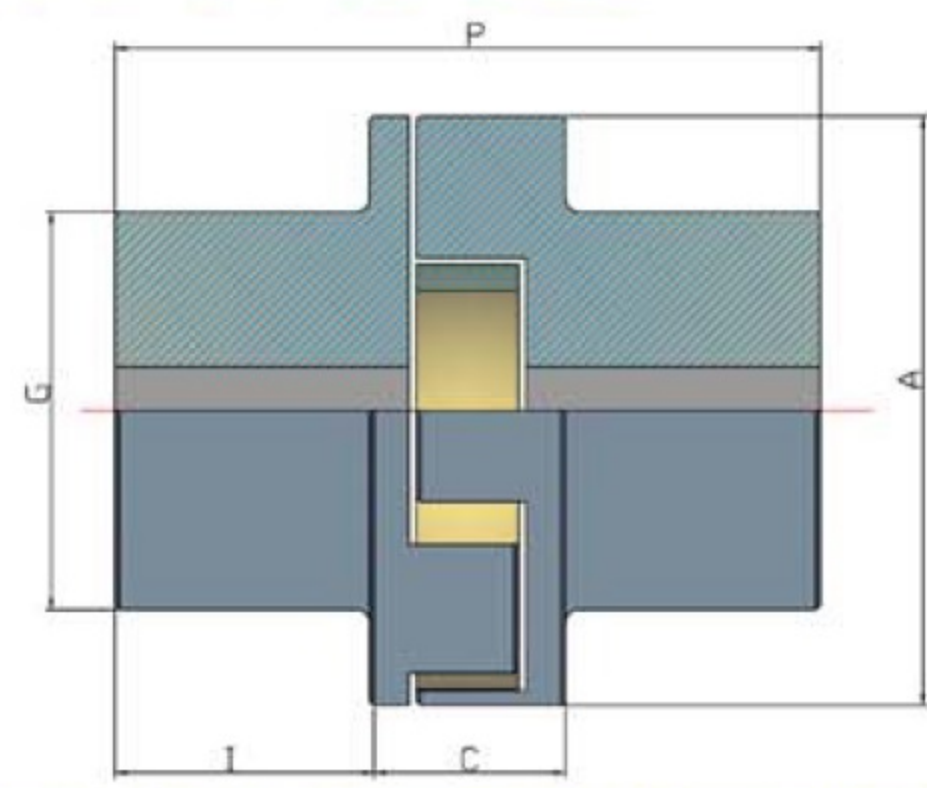


TIPO TYPE	ESTRELLA SPIDER BAGUE	Ø Int. Estrella Ø Spider Inside Ø Intérieur Bague	PAR TORQUE Kgm	MÁX R.P.M.	HP /RPM	A	P	C	G	I	Ejes /Boros /Alésages		Peso Weight Poids Kgs.
											Min.	Max.	
SR-50	50x10	20	VER INFORMACION EN TABLA DE ESTRELLAS SEE INFORMATION IN TABLE OF SPIDERS BELOW VERIFIER LES INFORMATIONS CONTENUES DANS LE TABLEAU DES BAGUES BAS	10.000	0,0017	50	50	18	30	16	0	19	0,4
SRL-50	50x10	20		10.000	0,0017	50	62	18	32	22	0	20	0,5
SR-60	60x14	27		8.500	0,0032	60	62	24	40	19	0	24	0,7
SRL-60	60x14	27		8.500	0,0032	60	80	24	40	28	0	24	0,9
SE-60	60x14	27		8.500	0,0032	60	96	24	40	36	0	24	1
SN-75	75x16	31		7.000	0,007	75	71	27	41	22	13	25	0,9
SR-75	75x16	31		7.000	0,007	75	75	27	50	24	13	34	1,3
SRL-75	75x16	31		7.000	0,007	75	100	27	50	36,5	13	34	1,5
SE-75	75x23	26		7.000	0,012	75	125	37	57	44	13	38	2,5
SR-90	90x20	37		6.000	0,015	90	88	32	60	28	13	40	2,2
SRL-90	90x20	37		6.000	0,015	90	124	32	65	46	13	45	3,3
SE-90	90x20	37		6.000	0,015	90	174	32	65	71	13	45	4,5
SR-105	105x20	49		5.500	0,027	105	106	36	72	35	0	48	3,8
SRL-105	105x20	49		5.500	0,027	105	142	36	72	53	0	48	4,9
SN-120	120x20	47		4.500	0,041	120	100	38	70	31	0	48	4,2
SRL-120	120x20	47		4.500	0,041	120	158	38	80	60	0	55	7
SN-135	135x25	55		4.000	0,063	135	115	43	75	36	0	52	5,8
SRL-135	135x25	55		4.000	0,063	135	185	45	90	70	0	65	10,5
SN-150	150x28	63		3.500	0,088	150	128	48	80	40	0	55	7,7
SRL-150	150x28	63		3.500	0,088	150	212	52	100	80	0	70	15
SN-175	175x32	67		3.000	0,13	175	148	56	95	46	0	70	12,5
SRL-175	175x32	67		3.000	0,13	175	238	58	115	90	0	85	23
SN-200/35	200x35	71		2.750	0,189	200	169	61	110	54	0	80	19
SRL-200/35	200x35	71		2.750	0,189	200	265	65	130	100	0	100	31
SRL-200/40	200x40	100		2.750	0,352	200	270	70	130	100	0	100	30
SN-245	245x40	120		2.500	0,682	245	260	80	170	90	0	130	60
SR-245	245x40	120		2.500	0,682	245	340	80	170	130	0	130	65
SR-300	300x50	168		1.800	1,117	300	396	96	200	150	0	140	110
SR350	350X55	175		1.750	1,665	350	425	105	250	160	0	180	170

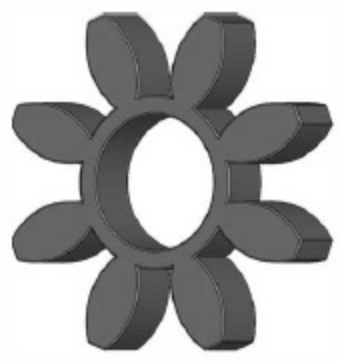

NBR
85° ShA

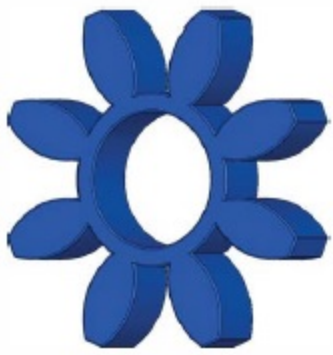

NBR
85-90° ShA

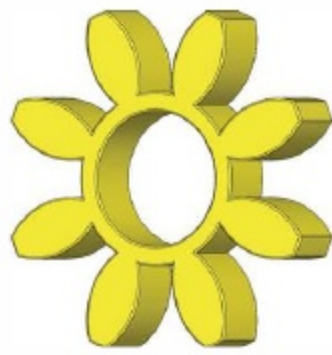


Polyurethane
93° ShA



Polyurethane
93° ShA



Polyurethane
98° ShA

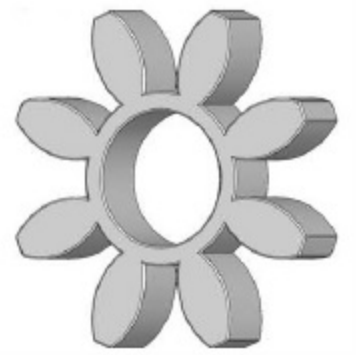

Polyurethane
64° ShD*

CARACTERÍSTICAS-CHARACTERISTICS-CARACTÉRISTIQUES

TIPO TYPE	NBR	NBR	POLIURETANO POLYURETHANE	POLIURETANO POLYURETHANE	POLIURETANO POLYURETHANE	POLIURETANO POLYURETHANE
USO USE UTILISATION	ALTA ELASTICIDAD HIGH ELASTICITY HAUTE ELASTICITÉ	ALTA TEMPERATURA HIGH TEMPERATURE HAUTE TEMPÉRATURE	ESTANDAR STANDARD	VULKOLLAN MONTAJE EXTERIOR EXTERIOR MOUNTING EXTÉRIEUR DE MONTAGE	VULKOLLAN ALTA TRANSMISION DE PAR HIGH TRANSMISSION TORQUE HAUTE TORQUE	ALTA RIGIDEZ HIGH RIGIDITY HAUTE RIGIDITÉ
COLOR COLOUR COULEUR	NEGRO BLACK NOIR	AZUL BLUE BLEU	AMARILLA YELLOW JAUNE	ROJA RED ROUGE	VERDE GREEN VERT BLANCA WHITE BLANC	BLANCA WHITE BLANC
DUREZA HARDNESS DURETÉ	85 °Sh A	85 °/90° SH A	93 °Sh A	93 °Sh A	98 °Sh A	64 °Sh O
TEMPERATURA TRABAJO / WORKING TEMPERATURE / TEMPÉRATURE DE FONCTIONNEMENT	- 20 °C + 85 °C	- 20 °C +135 °C	- 20 °C + 85 °C	- 20 °C + 85 °C	- 20 °C + 85 °C	- 20 °C + 85 °C

TIPO TYPE	PAR TRABAJO / WORKING TORQUE / TORQUE DE FONCTIONNEMENT					
50X10	-	1,2	1,2	2	2	2,5
60X14	-	3,5	3,5	5	6	7,3
75X16	7,2	8	8	12	13,6	16,8
75X23	11	-	-	-	-	-
90X20	14,4	16	16	24	27,2	33,6
105X20	24,3	27	27	40	45,9	56,7
120X20	36	40	40	60	68	84
135X25	58,5	65	65	90	110,5	136,5
150X28	81	90	90	135	153	189
175X32	121,5	135	135	-	202,5	283,5
200X35	171	190	190	-	285	380
200X40	-	305	305	-	381	-
245X40	-	-	489	-	611	-
300X50	-	-	790	-	1000	-
350X55	-	-	1200	-	1500	-
445x40	-	-	2000	-	2500	-