
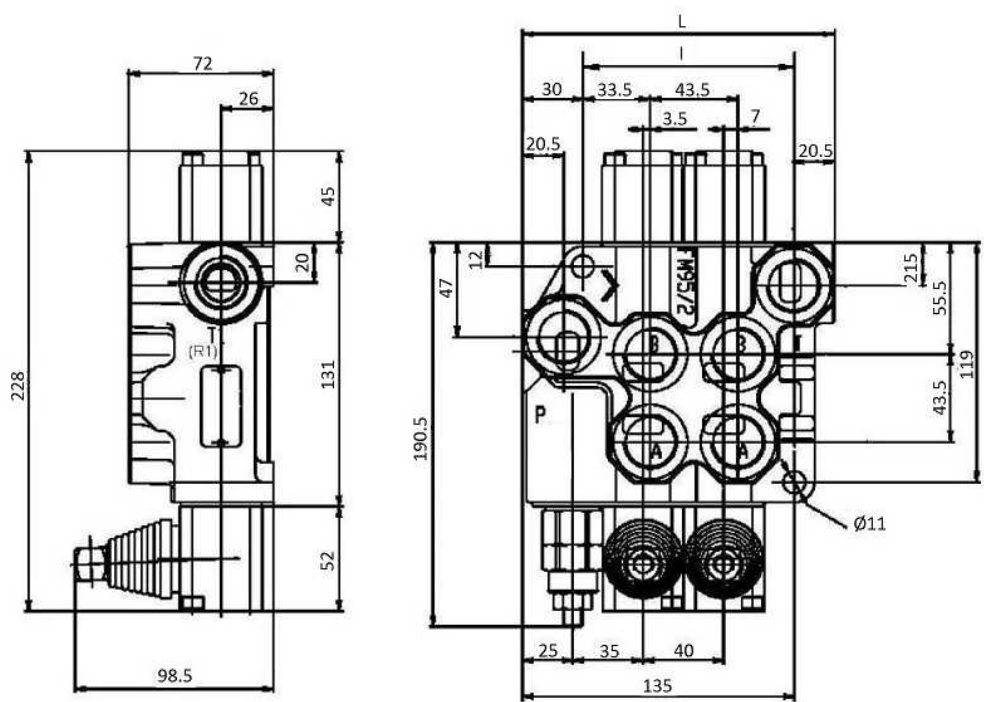


FM85+relief valve. Manual operator, return to center by spring

1/1



Nominal Flow 90 l/min

Max Flow 100 l/min

Nominal Pressure 250 bar

Max Working Pressure 320 bar

Max Tank-Line Pressure 80 bar

Check Valve · 100 to 250 bar  
· Standard: 140 bar

A - B 3/4"

| Part n°            | R1       | Type         | Max. flow<br>(l/min) | Max.<br>Press.<br>(bar) | Levers | I   | L   |
|--------------------|----------|--------------|----------------------|-------------------------|--------|-----|-----|
| FM85/1 3/4 1P D.E. | 3/4" BSP | D.E          | 100                  | 320                     | 1      | 65  | 115 |
| FM85/1 3/4 1P S.E. | 3/4" BSP | S.E          | 100                  | 320                     | 1      | 65  | 115 |
| FM85/2 3/4 2P DD   | 3/4" BSP | DE - DE      | 100                  | 320                     | 2      | 105 | 155 |
| FM85/2 3/4 2P DS   | 3/4" BSP | DE - SE      | 100                  | 320                     | 2      | 105 | 155 |
| FM85/3 3/4 3P DDD  | 3/4" BSP | DE - DE - DE | 100                  | 320                     | 3      | 145 | 195 |
| FM85/3 3/4 3P DDS  | 3/4" BSP | DE - DE - SE | 100                  | 320                     | 3      | 145 | 195 |

FM85= BM100