
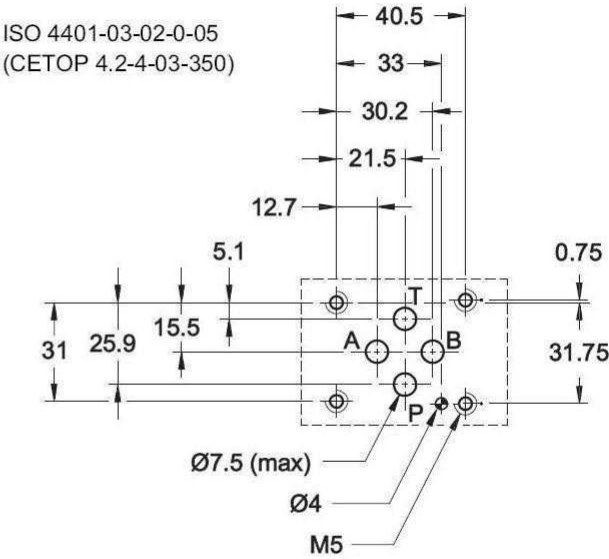


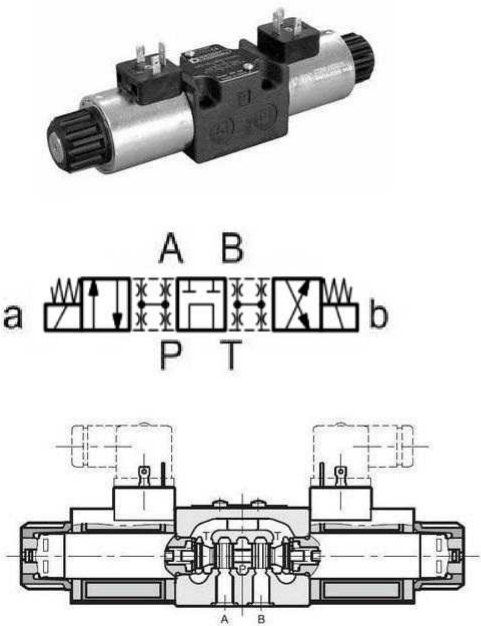

Presión maxima de trabajo: en P - A - B= 350 bar
en T - Corriente Continua=210 bar
en T - Corriente Alterna=160 bar

Artículo	Tamaño	Voltaje (V)	Caudal máx. (l/min)	Pres. max. (bar)	f (Hz)
DS3-S4/10N-A110-50K1	NG-6	110 V-50Hz / 120 V-60Hz	40	350	50/60
DS3-S4/10N-A230-50K1	NG-6	230 V-50Hz / 240 V-60Hz	40	350	50/60
DS3-S4/10N-A24-50K1	NG-6	24 VAC	40	350	
DS3-S4/10N-A48-50K1	NG-6	48 VAC	40	350	
DS3-S4/10N-D12K1	NG-6	12 VDC	40	350	
DS3-S4/10N-D24K1	NG-6	24 VDC	40	350	
DS3-S4/10N-D48K1	NG-6	48 VDC	40	350	