

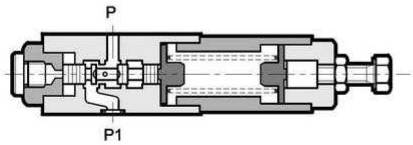


Reductora de presión en P



ISO 4401-03-02-0-05
(CETOP 4.2-4-03-350)

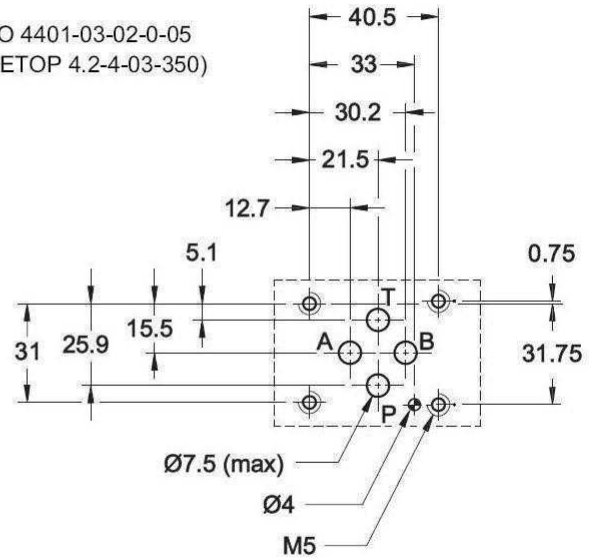

Presión Máxima de Conexión T: 10 bar

Caudal Máximo en Conductos Controlados: 50 l/min

Caudal Máximo en Conductos Libres: 75 l/min

Caudal de Drenaje: <0.08 l/min

Artículo	Tamaño	Pres. max. (bar)	Campo reg. (bar)
MZD2/50	NG-6	350	3 - 35
PZM3-P035/10N/S	NG-6	350	3 - 35
PZM3-P035/10N/S/W7	NG-6	350	3 - 35
PZM3-P070/10N/S	NG-6	350	10 - 70
PZM3-P070/10N/S/W7	NG-6	350	10 - 70
PZM3-P140/10N/S	NG-6	350	30 - 140
PZM3-P140/10N/S/W7	NG-6	350	30 - 140
PZM3-P280/10N/S	NG-6	350	60 - 280
PZM3-P280/10N/S/W7	NG-6	350	60 - 280

W7 zincado