

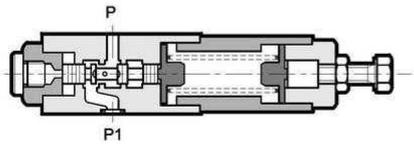


Reductora de presión en A



ISO 4401-03-02-0-05
(CETOP 4.2-4-03-350)

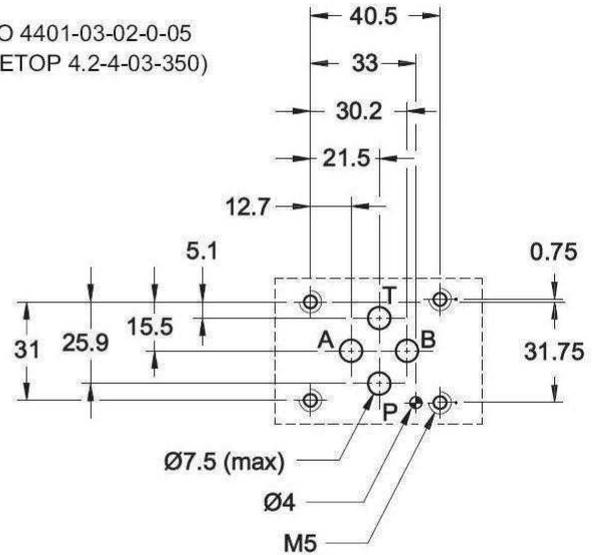

Presión Máxima de Conexión 10 bar
T

Caudal Máximo en Conductos Controlados 50 l/min

Caudal Máximo en Conductos Libres 75 l/min

Caudal de Drenaje <0.08 l/min

Artículo	Tamaño	Pres. max. (bar)	Campo reg. (bar)
MZD3/A/50	NG-6	350	10 - 70
MZD4/A/50	NG-6	350	30 - 140
PZM3-PA035/10N/S	NG-6	350	3 - 35
PZM3-PA035/10N/S/W7	NG-6	350	3 - 35
PZM3-PA070/10N/S	NG-6	350	10 - 70
PZM3-PA070/10N/S/W7	NG-6	350	10 - 70
PZM3-PA140/10N/S	NG-6	350	30 - 140
PZM3-PA140/10N/S/W7	NG-6	350	30 - 140
PZM3-PA280/10N/S	NG-6	350	60 - 280
PZM3-PA280/10N/S/W7	NG-6	350	60 - 280

W7 zincado
Modelo MZD hasta fin de existencias