

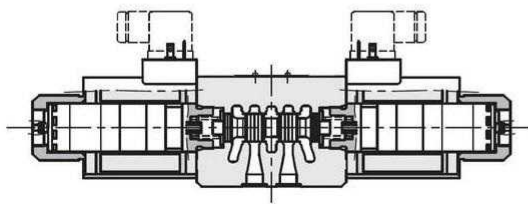
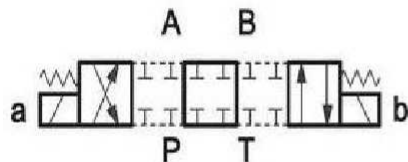
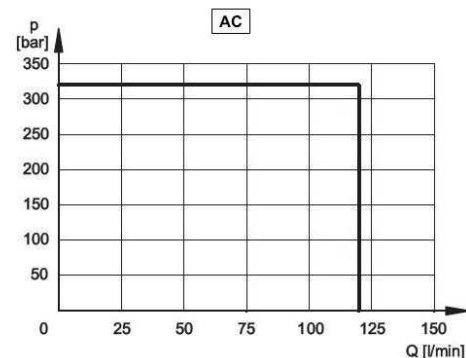


## Electroválvula NG10- corredera S1

**1/1**

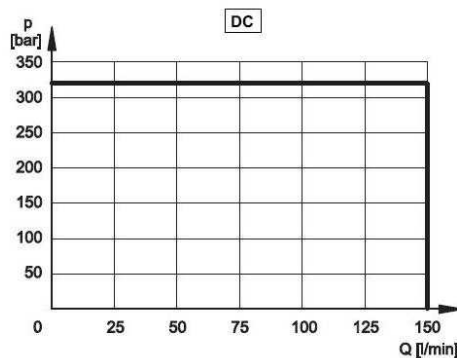

ISO 4401-05-04-0-05  
(CETOP 4.2-4-05-320)

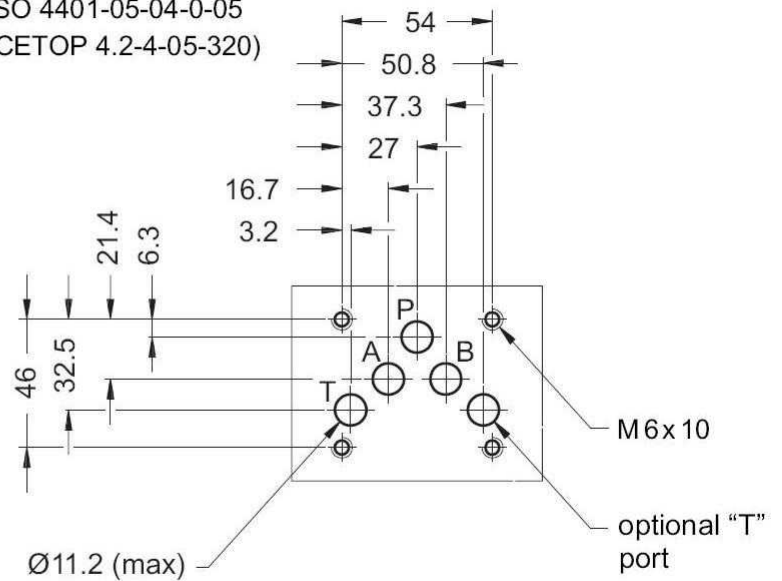

**Presión máxima de trabajo:** en P - A - B= 320 bar  
en T - Corriente Continua=210 bar  
en T - Corriente Alterna=140 bar

| Artículo                    | Tamaño | Voltaje (V) | Caudal máx.<br>(l/min) | Pres. max.<br>(bar) | f (Hz) |
|-----------------------------|--------|-------------|------------------------|---------------------|--------|
| <b>DS5-S1/11N-A110-50K1</b> | NG-10  | 110 VAC     | 120                    | 320                 | 50/60  |
| <b>DS5-S1/11N-A230-50K1</b> | NG-10  | 220 VAC     | 120                    | 320                 | 50/60  |
| <b>DS5-S1/11N-A24-50K1</b>  | NG-10  | 24 VAC      | 120                    | 320                 |        |
| <b>DS5-S1/11N-A48-50K1</b>  | NG-10  | 48 VAC      | 120                    | 320                 |        |
| <b>DS5-S1/11N-D12K1</b>     | NG-10  | 12 VDC      | 120                    | 320                 |        |
| <b>DS5-S1/11N-D24K1</b>     | NG-10  | 24 VDC      | 120                    | 320                 |        |
| <b>DS5-S1/11N-D48K1</b>     | NG-10  | 48 VDC      | 120                    | 320                 |        |