




**Presión máxima de trabajo** en P - A - B: 320 bar  
en T - Corriente Continua: 210 bar  
en T - Corriente Alterna: 140 bar

| Artículo             | Tamaño | Voltaje (V) | Caudal máx. (l/min) | Pres. max. (bar) | f (Hz) |
|----------------------|--------|-------------|---------------------|------------------|--------|
| DS5-S4/11N-A110-50K1 | NG-10  | 110 VAC**   | 120*                | 320              | 50/60  |
| DS5-S4/11N-A230-50K1 | NG-10  | 220 VAC**   | 120*                | 320              | 50/60  |
| DS5-S4/11N-A48-50K1  | NG-10  | 48 VAC**    | 120*                | 320              |        |
| DS5-S4/11N-D12K1     | NG-10  | 12 VDC      | 120*                | 320              |        |
| DS5-S4/11N-D24K1     | NG-10  | 24 VDC      | 120*                | 320              |        |
| DS5-S4/11N-D48K1     | NG-10  | 48 VDC      | 120*                | 320              |        |

\*120 lts / 200 bar  
\*\*Presion máxima 320 bar máximo 50 lts  
\*\*Presion hasta 100 bar 50-75 lts

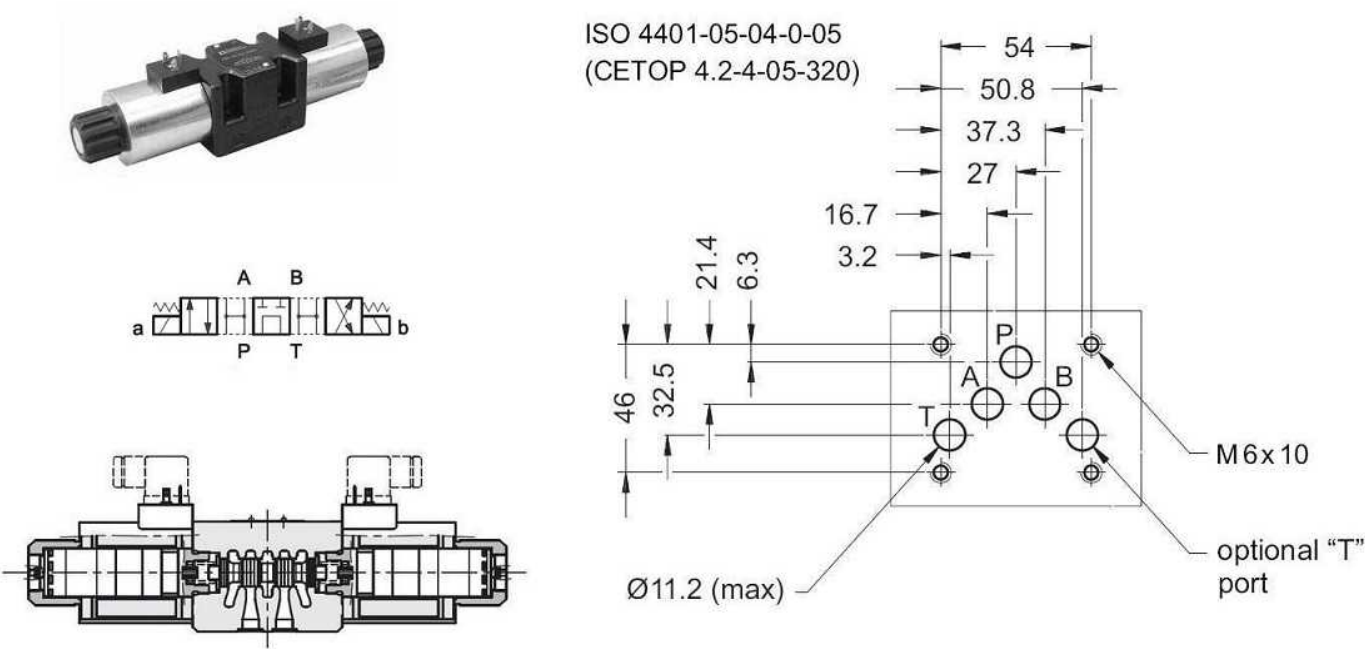