
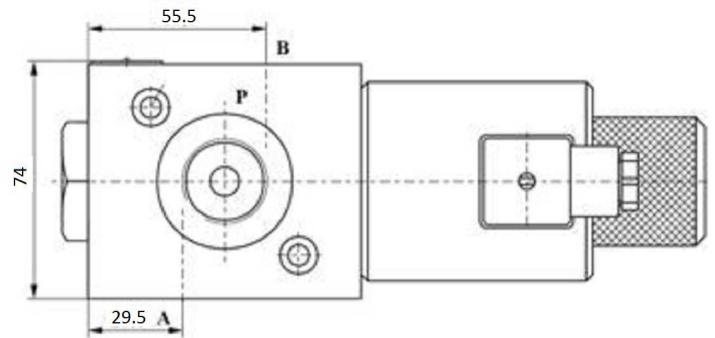
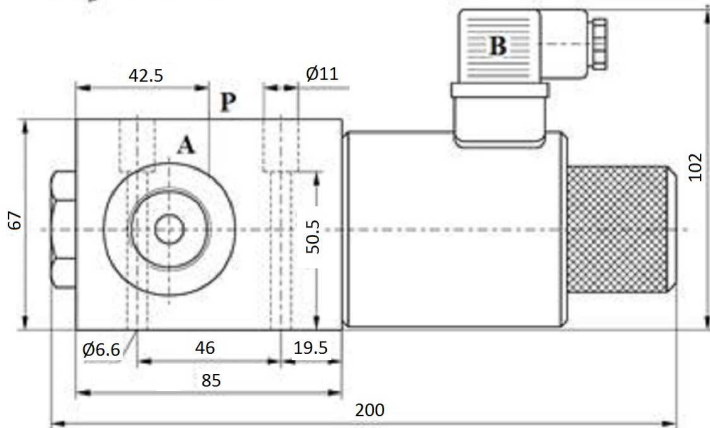

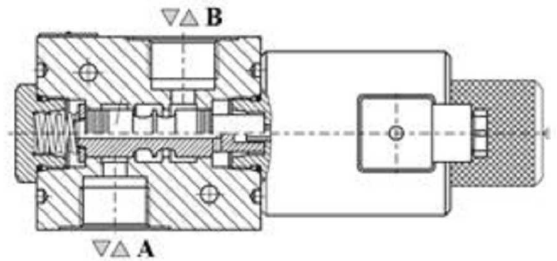


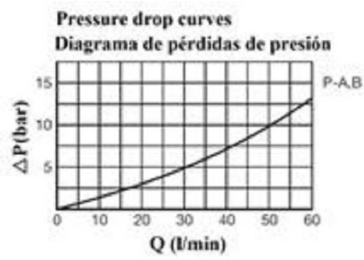

Bobina: Protección IP65. Potencia: 45 W

Tª de trabajo: [-20, +70] °C

Artículo	R1	Nº vías	Voltaje (V)	Caudal máx. (l/min)	Pres. max. (bar)
KVC-3/2-10-41B-12DC1/2	1/2" BSP	3	12 VDC	60	250
KVC-3/2-10-41B-24DC1/2	1/2" BSP	3	24 VDC	60	250