


Antirretorno simple pilotaje montaje sobre placa

1/1

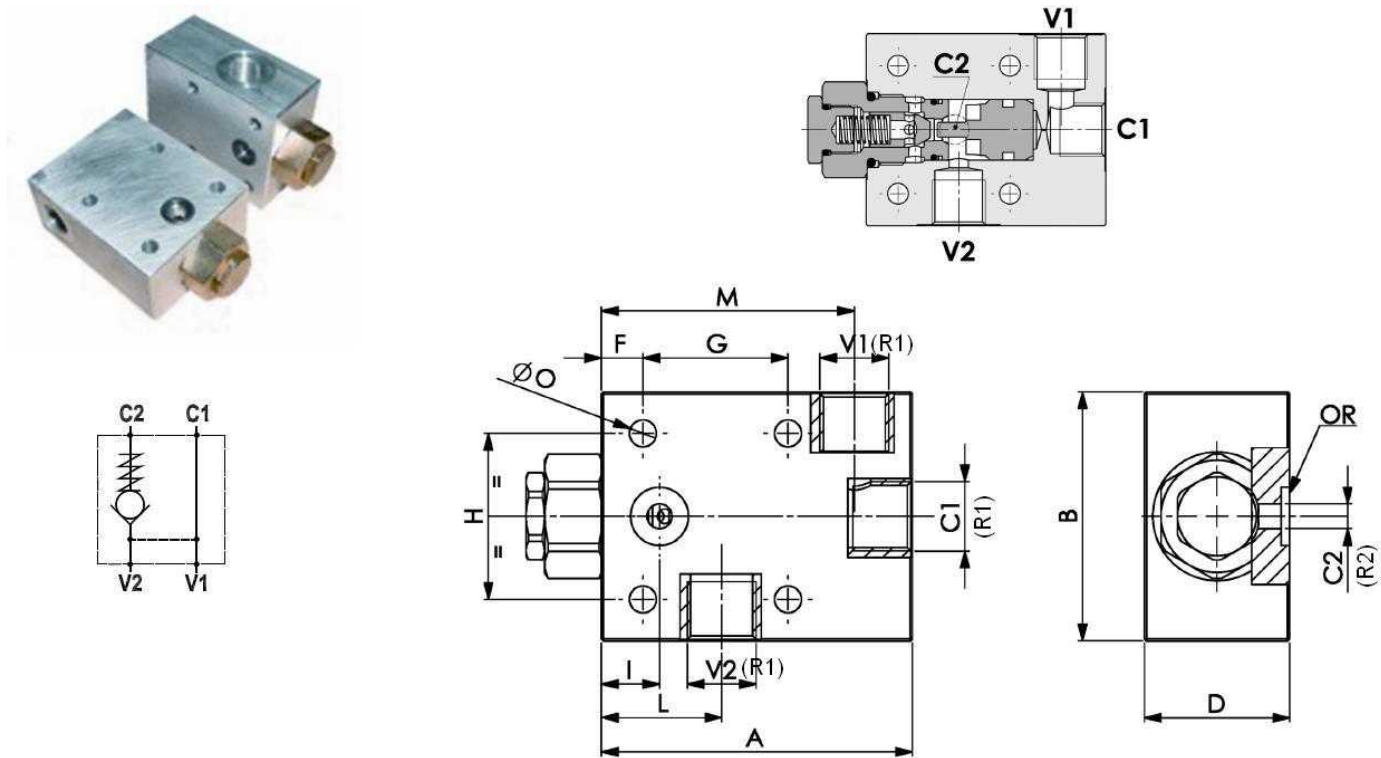

Materiales · Cuerpo: Aluminio
· Interior: Acero Templado

Presión de Apertura 2,5 bar (bajo pedido 5-10 bar)

Junta (OR) · FPSF 3/8": 9,19x2,62
· FPSF 1/2": 15,54x2,62
· FPSF 3/4": 18,64x3,53

Artículo	R1	R2	Caudal máx. (l/min)	Pres. máx. (bar)	Ratio pilotaje	ØO	A	B	D	F	G	H	I	L	M
VSSF 3/8	3/8" BSP	6 mm	25	250	1:7	6,5	75	60	34	10	35	40	14	29	61
VSSF 1/2	1/2" BSP	8 mm	45	250	1:3,5	8,5	95	70	34	15	40	40	22,5	38	76
VSSF 3/4	3/4" BSP	14 mm	85	250	1:4	10,5	135	90	49	15	65	50	30	57,5	113