
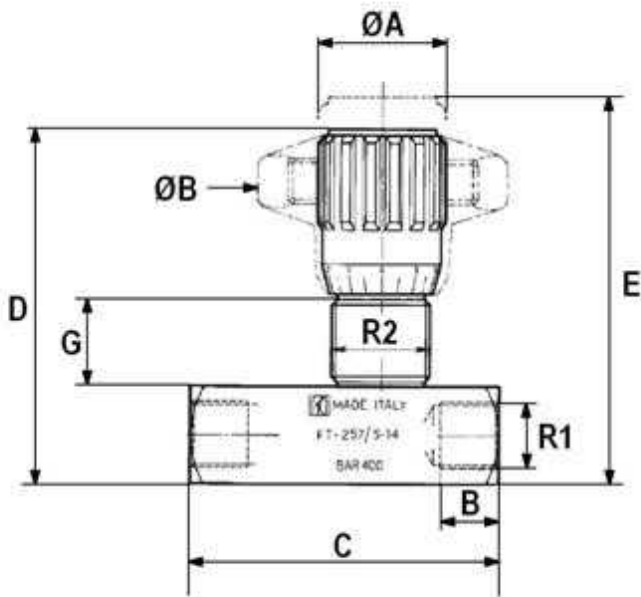




Temperatura de trabajo: -20°C \ 100°C

Artículo	R1	R2	Caudal máx. (l/min)	Pres. max. (bar)	Presión de rotura (bar)	Grado filtración	ØA	ØB	B	C	D	E	G
FT257502	1/8" BSP	M17X1	6	400	1.600	25	Ø22	Ø40	8,5	50	59	64	13,5
FT257504	1/4" BSP	M20X1	14	400	1.600	25	Ø27	Ø50	12,5	66	71	78	17
FT257506	3/8" BSP	M25X1,5	32	400	1.600	25	Ø33	Ø70	12,5	79	84	93	19,5
FT257508	1/2" BSP	M30X1,5	48	400	1.600	25	Ø38	Ø80	15,5	94,5	97	107	21
FT257512	3/4" BSP	M40X1,5	80	400	1.600	25	Ø47	Ø100	17	115	120,5	132,5	26,5
FT257516	1" BSP	M50X1,5	180	320	1.300	25	Ø58	Ø120	20	138,5	151,5	167,5	35
FT257520	1" 1/4 BSP	M50X1,5	200	320	1.300	25	Ø58	Ø120	22	157	156,5	172,5	35
FT257524	1" 1/2 BSP	M55X2	210	320	1.300	25	Ø58	Ø120	24	190	167	181	35

*** Revisar PDF adjunto ***