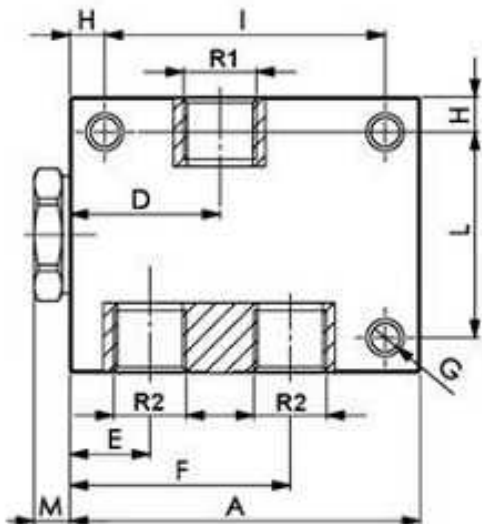

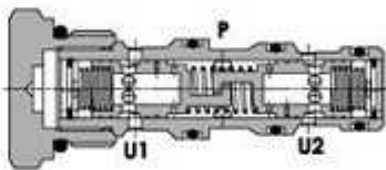


Material: cartucho y cuerpo en acero

Artículo	R1	R2	Caudal (l/min)	Pres. max. (bar)	A	B	C	D	E	F	G	H	I	L	M
VSFD S10 CB 3/8 3/8 SA	3/8" BSP	3/8" BSPP	1-5	350	80	35	63	34	18	50	6,5	8	64	47	8
VSFD S10 CB 3/8 3/8 SE	3/8" BSP	3/8" BSPP	5-10	350	80	35	63	34	18	50	6,5	8	64	47	8
VSFD S10 CB 3/8 3/8 SI	3/8" BSP	3/8" BSPP	10-20	350	80	35	63	34	18	50	6,5	8	64	47	8
VSFD S10 CB 1/2-3/8 SM	1/2" BSP	3/8" BSPP	20-40	350	80	35	63	34	18	50	6,5	8	64	47	8
VSFD S10 CB 1/2-3/8 SQ	1/2" BSP	3/8" BSPP	40-50	350	80	35	63	34	18	50	6,5	8	64	47	8
VSFD S12 CB 1/2 1/2 SA	1/2" BSP	1/2" BSPP	50-75	350	115	40	80	53,3	27,3	78,3	6,5	8	99	64	10,7
VSFD S12 CB 3/4 1/2 SE	3/4" BSP	1/2" BSPP	75-100	350	115	40	80	53,3	27,3	78,3	6,5	8	99	64	10,7
VSFD S16 CB 3/4-3/4 SA	3/4" BSP	3/4" BSPP	80-115	350	125	50	100	54,3	25,8	82,8	8,5	10	105	80	12,7
VSFD S16 CB 1 3/4 SE	1" BSP	3/4" BSPP	115-150	350	125	50	100	54,3	25,8	82,8	8,5	10	105	80	12,7