

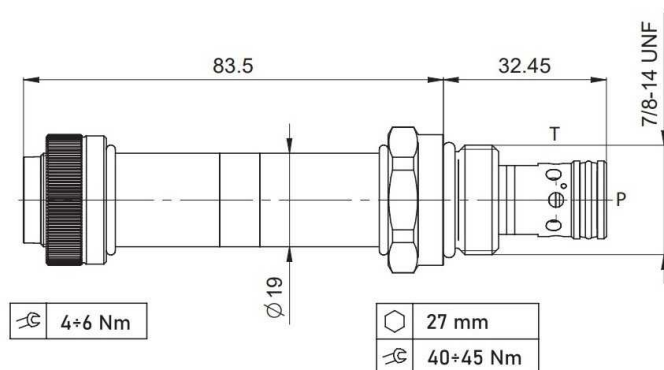


Limiti di impiego/Limits of appl.

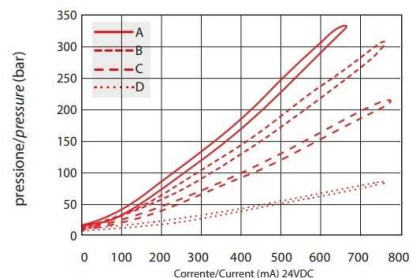

Perdite di carico/Pressure drop

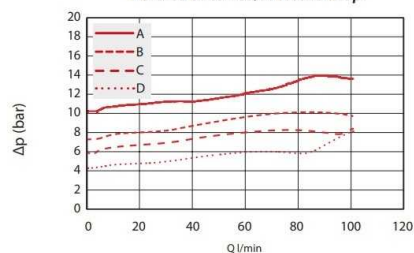

Olío idraulico minerale 32 cSt – temp. 55 °C [131 °F]
Hydraulic mineral Oil 32 cSt – temp. 55 °C [131 °F]

Artikel	R1	Regulierungsrate (bar)	Spannung
VLPROP1/2A12VDC	1/2" BSP	0-80	12VDC
VLPROP1/2B12VDC	1/2" BSP	160-200	12VDC
VLPROP1/2C12VDC	1/2" BSP	90-290	12VDC
VLPROP1/2D12VDC	1/2" BSP	120-350	12VDC
VLPROP1/2A24VDC	1/2" BSP	0-80	24VDC
VLPROP1/2B24VDC	1/2" BSP	160-200	24VDC
VLPROP1/2C24VDC	1/2" BSP	90-290	24VDC
VLPROP1/2D24VDC	1/2" BSP	120-350	24VDC