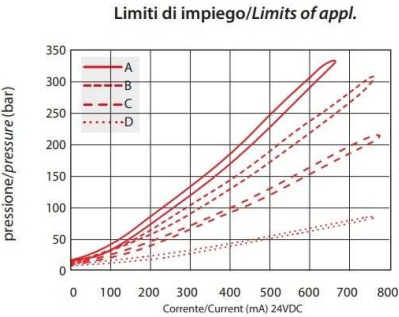
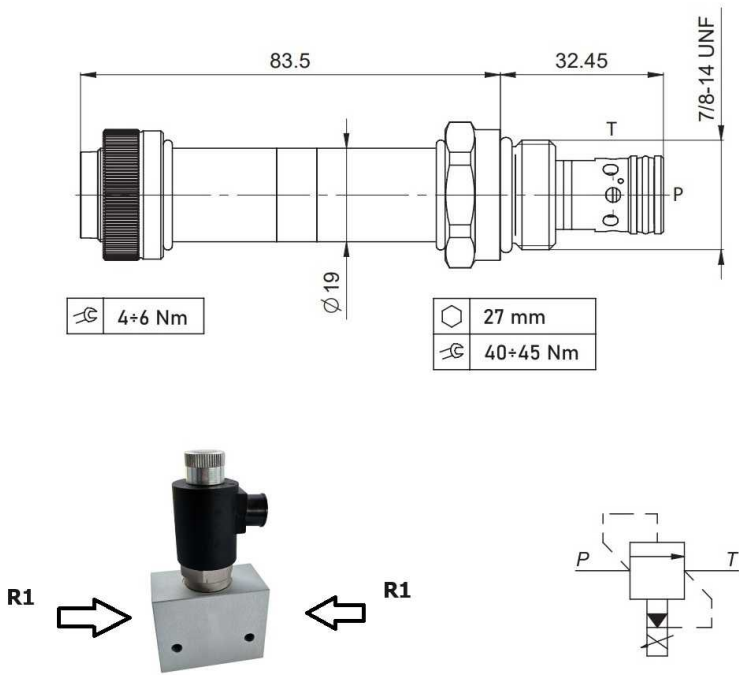


Olio idraulico minerale 32 cSt – temp. 55 °C [131 °F]  
Hydraulic mineral Oil 32 cSt – temp. 55 °C [131 °F]

| Artículo        | R1       | Campo reg. (bar) | Voltaje (V) |
|-----------------|----------|------------------|-------------|
| VLPROP1/2A12VDC | 1/2" BSP | 0-80             | 12VDC       |
| VLPROP1/2B12VDC | 1/2" BSP | 160-200          | 12VDC       |
| VLPROP1/2C12VDC | 1/2" BSP | 90-290           | 12VDC       |
| VLPROP1/2D12VDC | 1/2" BSP | 120-350          | 12VDC       |
| VLPROP1/2A24VDC | 1/2" BSP | 0-80             | 24VDC       |
| VLPROP1/2B24VDC | 1/2" BSP | 160-200          | 24VDC       |
| VLPROP1/2C24VDC | 1/2" BSP | 90-290           | 24VDC       |
| VLPROP1/2D24VDC | 1/2" BSP | 120-350          | 24VDC       |