


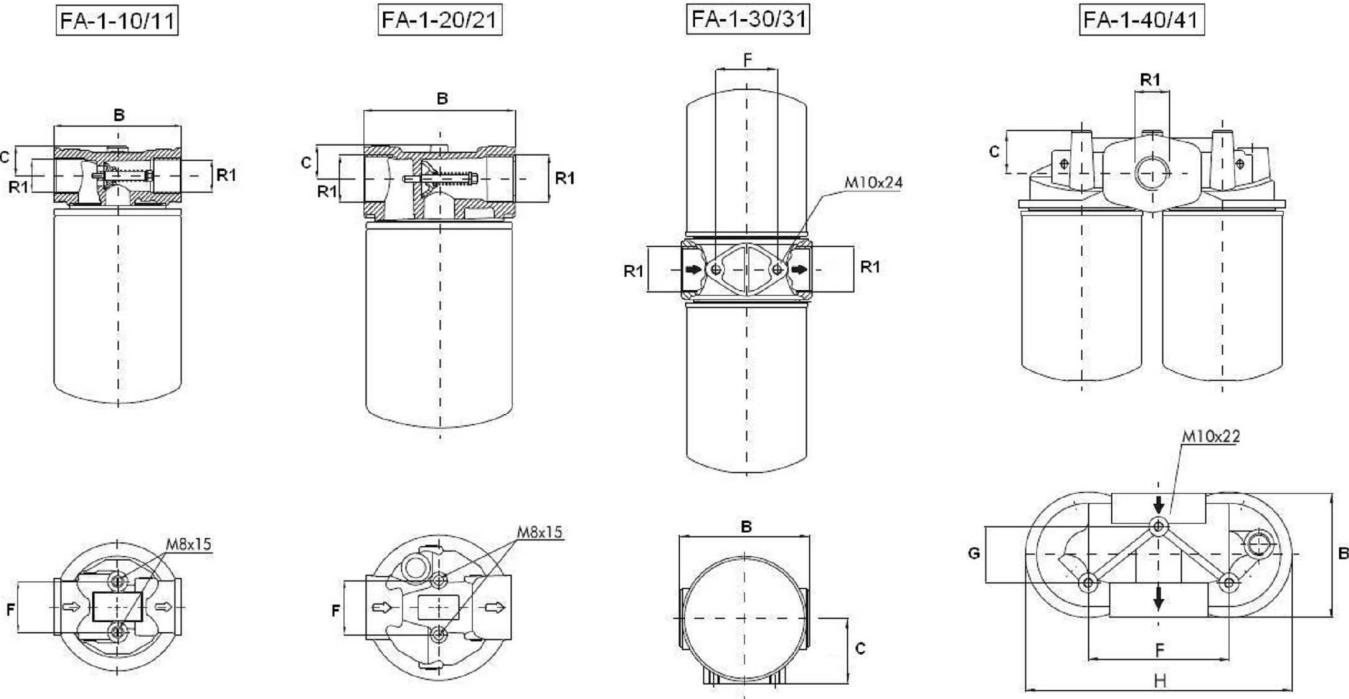

By-pass in Suction line: 0,25 bar
By-Pass in Return line: 1,7 bar
As per NFPA T 3.10.17: Max.pressure:12 bar
Test pressure: 15 bar
Burst pressure:20 bar
WorkingTemperature: De -25°C a 120°C
Materials: Head-aluminium
Housing-carbon steel
Seal-Buna-N

Part nº	R1	Type	Cartridge	B	C	F	G	H
FA-1-10/11-A	3/4" BSP	ASPIRACION	SPA-1-10 - SPA-1-11	95	22	38	-	-
FA-1-20/21-A	1"1/4 BSP	ASPIRACION	SPA-1-20 - SPA-1-21	133	30	50	-	-
FA-1-30/31-A	1"1/2 BSP	ASPIRACION	SPA-1-20 - SPA-1-21	140	70	65	-	-
FA-1-40/41-A	1"1/2 BSP	ASPIRACION	SPA-1-20 - SPA-1-21	132	46	150	60	284
FA-1-10/11-R	3/4" BSP	RETORNO	SPA-1-10 - SPA-1-11	95	22	38	-	-
FA-1-20/21-R	1"1/4 BSP	RETORNO	SPA-1-20 - SPA-1-21	133	30	50	-	-
FA-1-30/31-R	1"1/2 BSP	RETORNO	SPA-1-20 - SPA-1-21	140	70	65	-	-
FA-1-40/41-R	1"1/2 BSP	RETORNO	SPA-1-20 - SPA-1-21	132	46	150	60	284

For the FA-1-30/31 and FA-1-40/41 shells, TWO cartridges will be placed.
The by-pass valve is included.