
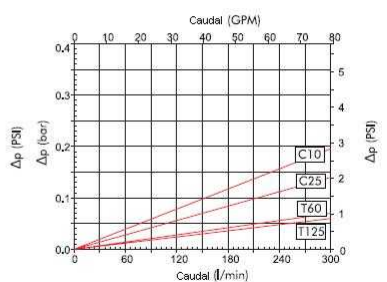
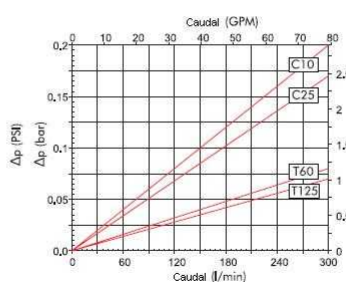



SPA-1-10

SPA-1-11

SPA-1-20

SPA-1-21



**Max Pressure** 12 bar  
**Filter Media** · Cellulose: 10 µm, 25 µm  
 · Wire mesh: 60 µm, 125 µm  
**Materials** · Body: Aluminium  
 · Seal: Buna-N  
**Working Temperature** -25°C / 120°C

Part n°	Size	Filtration degree	ØA	ØB	C	MATERIAL
SPA-1-10-C10	10	10 µm	96	3/4"	148	CELLULOSE
SPA-1-11-C10	11	10 µm	96	3/4"	213	CELLULOSE
SPA-1-20-C10	20	10 µm	128	1 1/4"	182	CELLULOSE
SPA-1-21-C10	21	10 µm	128	1 1/4"	228	CELLULOSE
SPA-1-10-C25	10	25 µm	96	3/4"	148	CELLULOSE
SPA-1-11-C25	11	25 µm	96	3/4"	213	CELLULOSE
SPA-1-20-C25	20	25 µm	128	1 1/4"	182	CELLULOSE
SPA-1-21-C25	21	25 µm	128	1 1/4"	228	CELLULOSE
SPA-1-10-T60	10	60 µm	96	3/4"	148	WIRE MESH
SPA-1-11-T60	11	60 µm	96	3/4"	213	WIRE MESH
SPA-1-20-T60	20	60 µm	128	1 1/4"	182	WIRE MESH
SPA-1-21-T60	21	60 µm	128	1 1/4"	228	WIRE MESH
SPA-1-10-T125	10	125 µm	96	3/4"	148	WIRE MESH
SPA-1-11-T125	11	125 µm	96	3/4"	213	WIRE MESH
SPA-1-20-T125	20	125 µm	128	1 1/4"	182	WIRE MESH
SPA-1-21-T125	21	125 µm	128	1 1/4"	228	WIRE MESH