


**45° wiederverwendbar. Innengewinde R5,
JIC-Konus 37°**

Edelstahl AISI 316-L

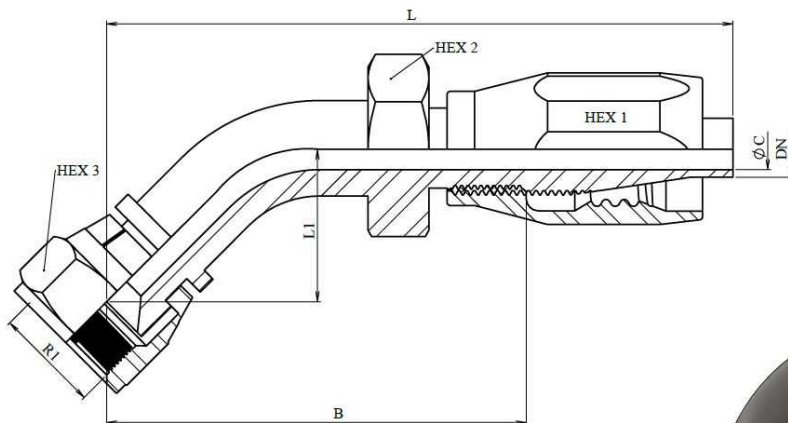

Artikel	DN	R1	L	L1	HEX 1	HEX 2	HEX 3	ØC	B
Z3J45-07-04-R5	3/16"	7/16" 20 UNF	85	20	17	17	14	4	51
Z3J45-07-05-R5	1/4"	7/16" 20h UNF	85	20	19	17	14	4	56
Z3J45-08-05-R5	1/4"	1/2" 20h UNF	75	20	22	17	17	4	44,5
Z3J45-09-06-R5	5/16"	9/16" 18h UNF	94	22	22	22	19	7	56
Z3J45-12-08-R5	13/32"	3/4" 16h UNF	103	25	24	27	24	8	66
Z3J45-12-10-R5	1/2"	3/4" 16h UNF	102	26	30	27	24	11,4	61,5
Z3J45-14-10-R5	1/2"	7/8" 14 UNF	109	25	30	27	27	8	69
Z3J45-17-12-R5	5/8"	1" 1/16 12 UNF	124	26	32	32	32	15	78,8
Z3J45-21-16-R5	7/8"	1" 5/16" 12 UNF	141	31	36	41	41	19	80