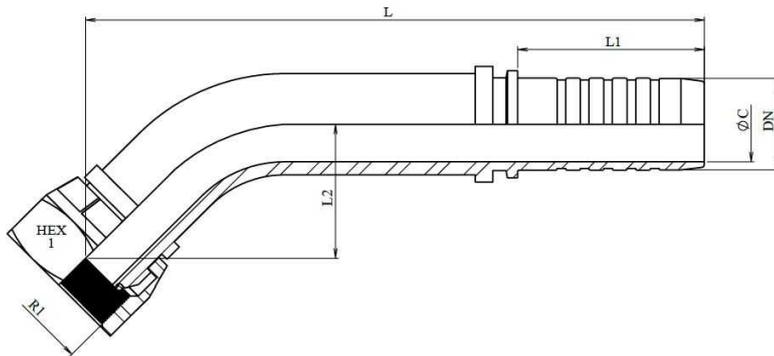


**Femmina a 45° BSP sede 60° con o'ring**

Acciaio Inossidabile AISI 316-L

**1/1**

| Codice            | DN    | R1        | L     | L1   | L2    | HEX 1 | ØC  |
|-------------------|-------|-----------|-------|------|-------|-------|-----|
| <b>Z661180808</b> | 1/2"  | 1/2" BSP  | 105,5 | 37,5 | 22,56 | 27    | 9,5 |
| <b>Z661181212</b> | 3/4"  | 3/4" BSP  | 148,8 | 47,5 | 30,87 | 32    | 14  |
| <b>Z661181616</b> | 1"    | 1" BSP    | 175,8 | 54   | 39,09 | 41    | 19  |
| <b>Z661182020</b> | 1"1/4 | 1"1/4 BSP | 212,2 | 64   | 46,63 | 50    | 25  |

MATERIALE TENUTA FKM